

LED


Tucana Argus

LED-Floodlight

karl-dose.com/Tucana



Tucana Argus

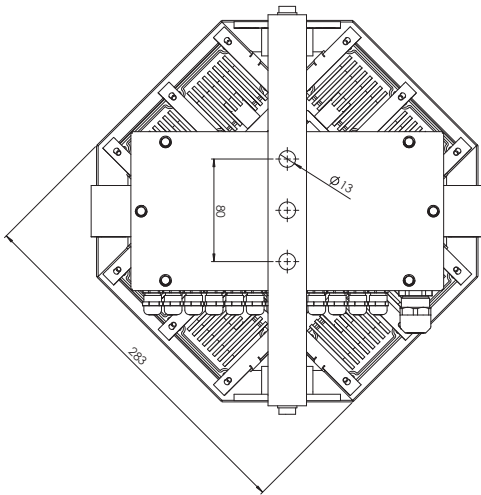


Technical Data

Name & No.	Watt	kg	Description
			Specially developed floodlight for lighting of more than 180° in all directions. The floodlight can be individually assembled with LED modules 45°x20° and 120°x120°: 45° x 20° for spot lighting 120° x 120° for area lighting On request, we can adjust the floodlight to your needs and also offer other combinations and sizes.
Tucana Argus	100W	6,8	<ul style="list-style-type: none"> • IP 67 • holding frame, connection box and bracket made of stainless steel • input voltage: 85-264V AC, 120-370V DC, 24V DC • output power: ca. 1.000 lm / LED module • 12 x High Power LED modules • luminous flux: approx. 12.000 lm


Spare Parts on request

Tucana Argus luminance diagram

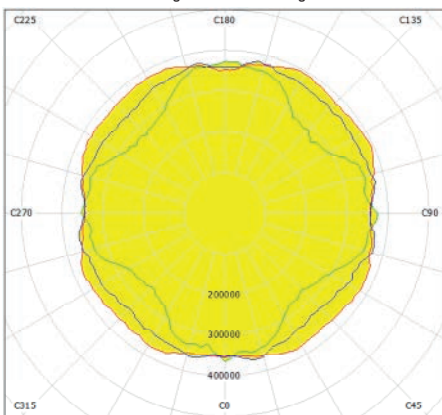


cd/m²
 — g = 55.0° — g = 65.0° — g = 75.0°

Tucana Argus light distribution curve linear

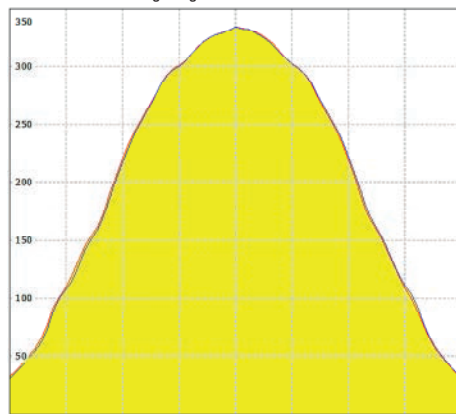

cd/klm
 — C0 - C180 — C90 - C270
 η = 100%

Tucana Argus light distribution curve polar

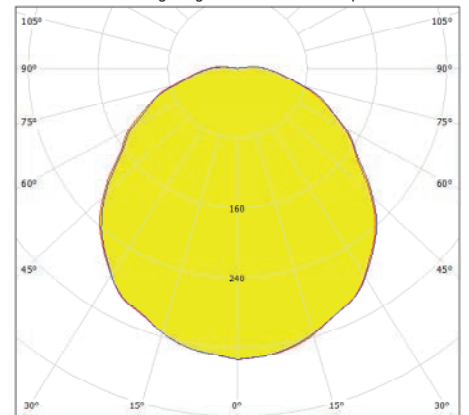

cd/klm
 — C0 - C180 — C90 - C270
 η = 100%