

Container Socket with Snap-In-Technology and Non-Metallic Flange



NEW
in our
container socket range






Twinny Basic



Twinny Pro / Twinny Power Selector

Technical Data


Name & No.	kg	Description
Twinny		<ul style="list-style-type: none"> • " IP 67 • extension for container sockets • 3P+PE • 2 x 32A • 380V, 400V - 440V • 50/60 Hz • flange without external elements • switch fastening with snap-in technology • no interior actuating linkage • circuit breaker: 10 kA (25 kA on request) • powder-coated on customer request • brass cable gland: M24x1,5 • 5 m connection cable with CEE plastic plug ARTEMIS 2005/P/St 32A • Certification: German Lloyd • also available with indicator LED"
Twinny BASIC	4,40	<ul style="list-style-type: none"> • aluminium housing, plastic flange • without selectivity • with specific anti-slip mat for a better grip
Twinny PRO	6,00	<ul style="list-style-type: none"> • stainless steel housing, plastic flange • with mounting bracket • without selectivity
Twinny POWER SELECTOR	6,00	<ul style="list-style-type: none"> • stainless steel housing, plastic flange • with mounting bracket • with selectivity

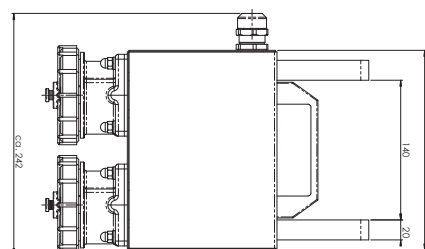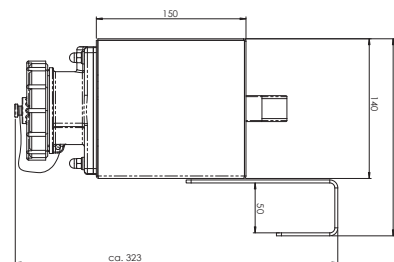



Twinny Pro / Twinny Pro Selector

Spare Parts on Request

additional with indicator-LED available

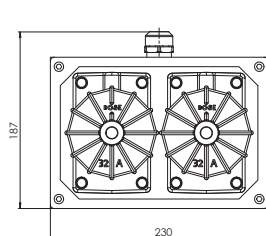

Twinny Basic



Alterations and technical developments reserved.