


# At Sea




*Putting safety first*



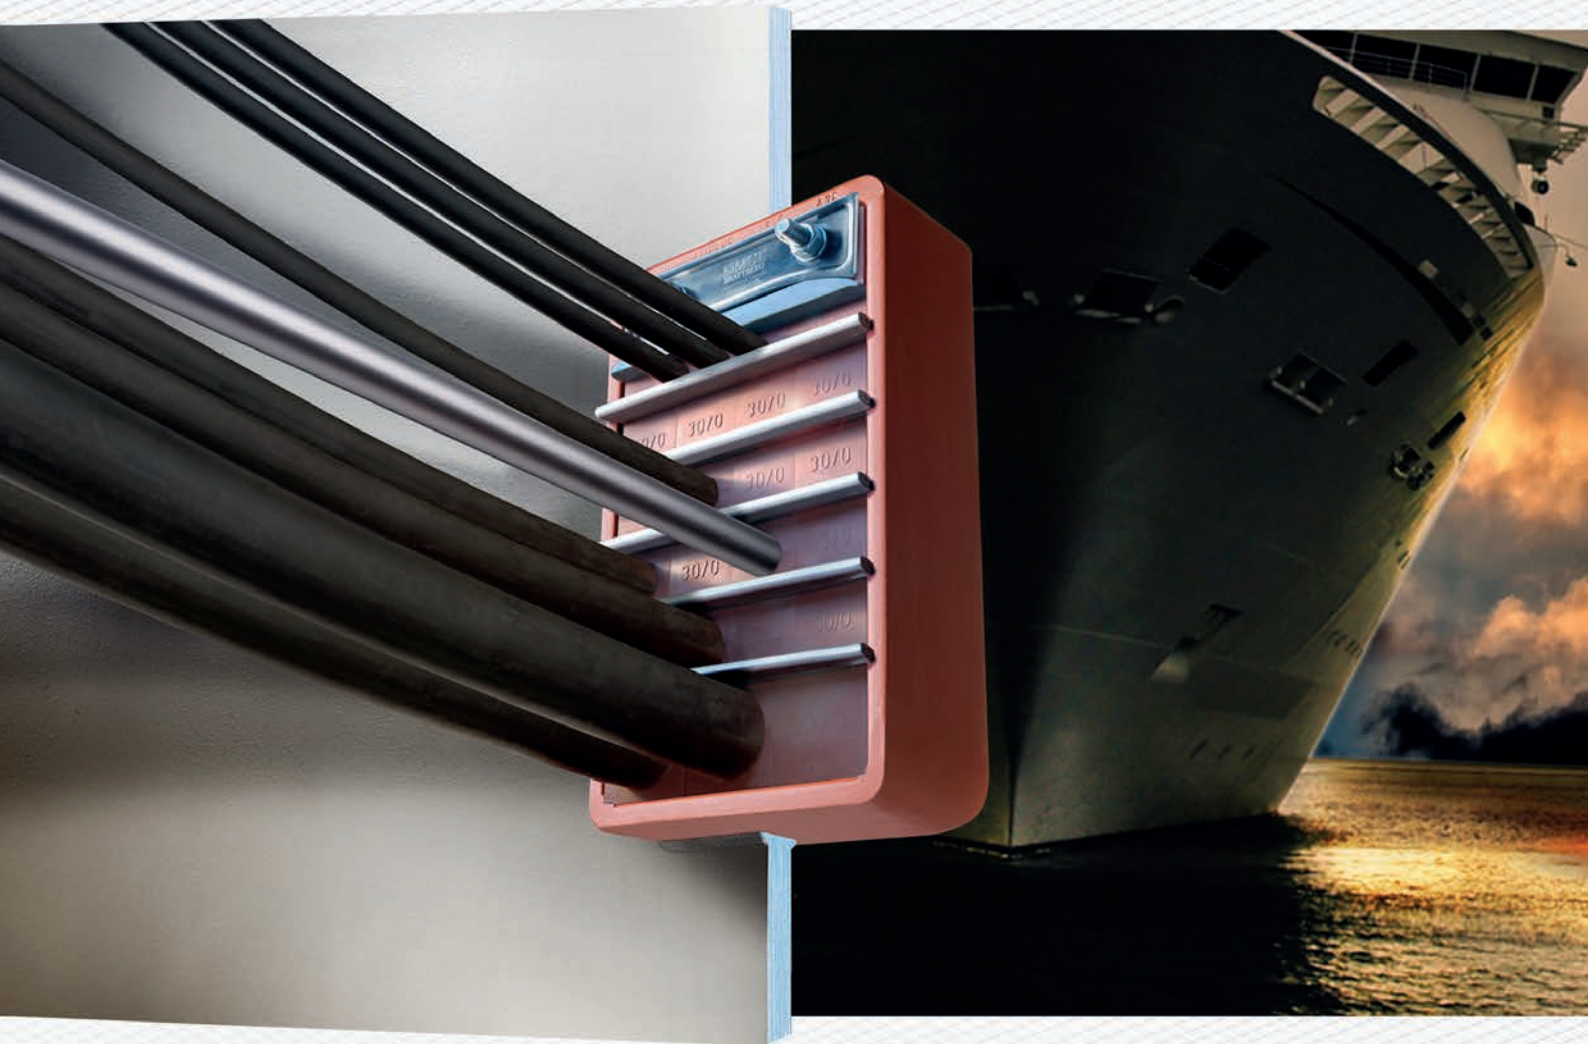

# Safety above all

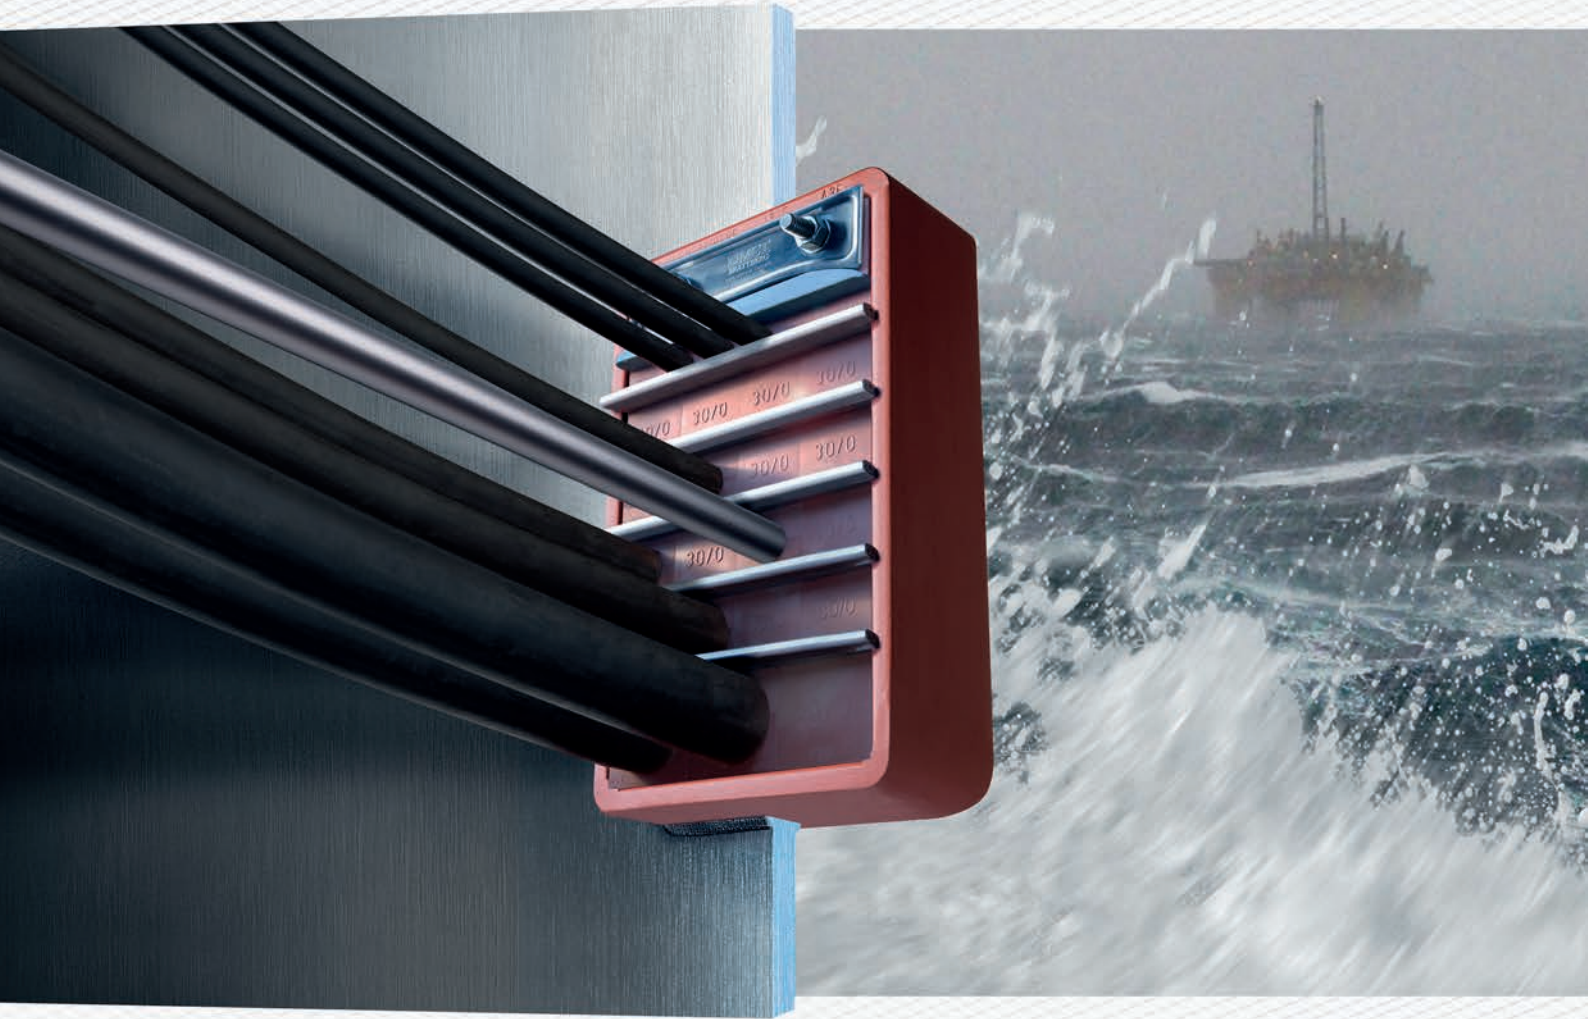

## DISCLAIMER

The author and publisher of this catalogue intend that this catalogue contain only general discussions and information; it is not intended to be comprehensive or to address all the possible contexts and situations involving the products and processes described herein. This catalogue is designed for generic study or research use only and is not a substitute for specific training or experience when utilizing the products and processes discussed herein. Nor is this catalogue intended to serve as a substitute for any proper training and/or certification needed for operation of the products and processes described herein. Accordingly, this catalogue is meant to be advisory and is not intended for specific application. Each application of the products and/or processes described herein may differ and the specifics involved must be addressed separately and individually depending on your situation.

MCT Brattberg (the "Company") assumes no liability for any use of or reliance upon any material contained or referenced in this catalogue; the use of this catalogue is at your own risk. THE COMPANY MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES AS TO MERCHANTABILITY, AS TO THE FITNESS OF THE CATALOGUE OR ITS CONTENTS FOR ANY PARTICULAR USE OR PURPOSE, NON-INFRINGEMENT, OR AS TO THE ACCURACY, APPLICABILITY, OR COMPLETENESS OF THE CONTENTS OF THE CATALOGUE, AND SHALL NOT BE LIABLE

FOR ANY LOSS OR DAMAGE, DIRECTLY OR INDIRECTLY, ARISING FROM THE USE OF SUCH CATALOGUE OR FOR CONSEQUENTIAL DAMAGES. In no event shall Company be liable for: (a) punitive, incidental or consequential damages arising out of the use of the information from this catalogue, including, but not limited to, damage to persons or property, loss of use, loss of time, inconvenience, equipment rental, loss of earnings or profits, loss of business opportunities, or any other commercial loss; or (b) any losses, claims, damages, expenses, liabilities or costs (including legal fees) resulting directly or indirectly from use of the material in this CATALOGUE, WHICH IS PROVIDED "AS IS," AND WITHOUT WARRANTIES. The conditions in this paragraph apply to any acts, omissions and negligence of Company that would give rise to a course of legal action. The reader hereby agrees to indemnify and hold harmless Company its officers, directors, shareholders, employees, agents, subsidiaries, affiliates, parent companies and successors in interest against all claims and expenses (including attorney fees) arising from the use of any information in the catalogue. Further, Company is not responsible for any warranties of any nature made by any representative or agent that have not also been agreed to in writing by an officer of the Company.

364 - 388174v1 056390/000001



# Productprogramme

			RGS	Pages 8-9
			RGSF	Pages 10-11
			RGSC	Pages 12-13
			RGSK and RGSbtb	Pages 14-16
			RGSR	Page 17
			Multiple Frame	Page 17
			RGP	Pages 18-19
			Accessories	Pages 20-21
			Planning	Pages 22-25
			Standard Block	Pages 26-27
			AddBlock	Page 28
			Plug	Page 29
			HandiBlock	Pages 30
			U-Block	Pages 31
			MSR, SR	Pages 32-33
			Deck and Bulkhead	Pages 34-35
			Welding instructions	Pages 36-37
			Installation guide	Pages 38-43
			Addresses	Page 44

The MCT Brattberg

# Putting Safety First

MCT Brattberg has taken a new step to ensure the correct standard of assembled MCT transits. We have done this through a partnership with Consilium Marine & Safety.

We now offer:

## INSPECTION

- Ensuring MCT's meet relevant standards.
- Ensure that MCT's were installed to manufacturer's instructions.

## TESTING

Pressure testing transit to customer requirements.

## TROUBLE SHOOTING

- Assist and Consult on installation of difficult installations.

## TRAINING


Conduct onshore and offshore training classes to ensure that MCT's will be installed to code and to manufacturer's instruction.





# Tested, approved and certified

Since the early 1950s, when we first started specializing in fireproof and pressure-sealed transits, quality testing and classification has been essential.

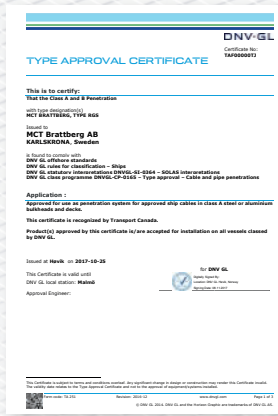

In 1986 our sealing method and quality system was adapted to meet the rigid requirements of the offshore industry, and have been continuously to current requirements. Today MCT Brattberg is assessed and certified by DNV, in accordance with the Quality and Environment Management system standard EN ISO 9001 and 14001, for the design, manufacture and supply of fire barrier and sealed transit systems associated with cable and pipe routes in building and marine environments. As a direct result of this achievement, quality and environmental assessments are carried out by DNV twice annually.

Our products are tested and certified by a long list of customers, laboratories and certification organizations.

ABS, American Bureau of Shipping - Canadian Coast Guard - Bureau Veritas - China Classification Society - Australian Maritime Safety Authority - DNV-GL, Det Norske Veritas - Korean Register of Shipping - Lloyds' Register of Shipping - Nippon Kaiji Kyokai Polski Rejestr Statkow - Germanischer Lloyd - Swedish Adm. of Shipping and Navigation - Croatian Register of Shipping - RINA, Registro Italiano Navale - Russian Maritime Register - US Coast Guard - US Navy - Underwriters Laboratories Inc. - Underwriters Laboratories of Canada

MCT Brattberg is also certified according to MED, Marine Equipment Directive (via Lloyds' Register of Shipping)

Please consult MCT Brattberg for latest updated certificates and approvals.

# The original cable transit

Based on the simple but clever idea of a frame with Insert Blocks and an end seal, the MCT Brattberg is the original transit system.

The MCT Brattberg system was patented in the early 1950s. When oil rigs and nuclear power stations demanded cable and pipe installations with proven safety records, the MCT Brattberg system became a worldwide solution, we've been improving it ever since. Comprehensive documentation shows that its resistance to fire, water, gas and pressure meets the latest safety requirements.

## The industry standard



Our own experience has shown that for a standard frame used for maritime applications, an internal width of 120.5 mm (4.74") a depth of 60 mm (2.36") and wall thickness of 10 mm (0.39") are optimal window sizes for maintaining structural strength and for fitting insert blocks. The welded corners are rounded for added strength. Both single and multiple transits frames are available.

The dimensions of the various frames have become the industry standard simply because these types of frames were the first to be introduced and have proved successful over time.

## Built in flexibility

The comprehensive range of frames, standard Blocks and other components of our transits provides remarkable application flexibility.

In addition, our product range covers insulation collars and special solutions for EMC transits, SR cable and pipe seals, deck/bulkhead glands.

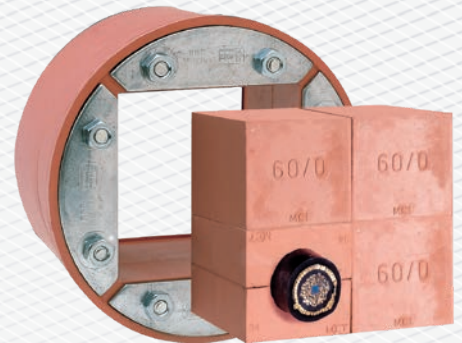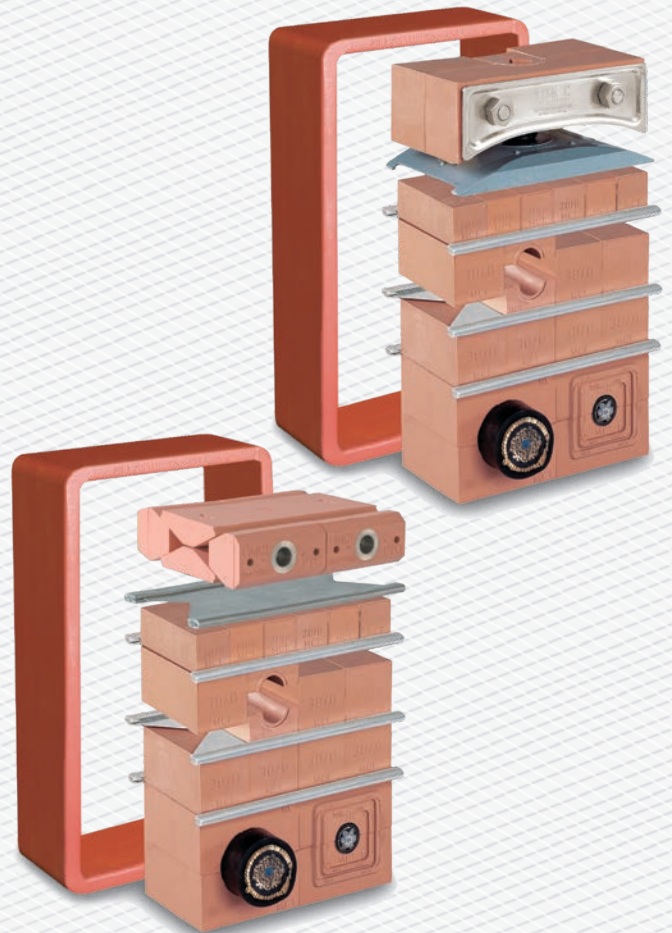



# Special products for specific uses

MCT Brattberg manufactures a number of special products. High pressure secure cable transits, transits for wave guides and blocks with built-in protection against electromagnetic pulse due to lightning or nuclear blast.

## High pressure seals

is an example of our special products. Several types of high pressure seals are available. Often these have been designed in collaboration with a customer. They are used, for example, in the supporting legs of oil rigs or in submarines. An example is the RGPH seal, which is certified up to 66.7 bar.

## The E-series

and components provide the same protection as the standard MCT Brattberg system but with added, built-in protection against electromagnetic pulses caused by lightning or nuclear blast.

They also give protection against interference, electronic sabotage and static electricity.

All dimensions are exactly the same as for the other MCT Brattberg components.

The E-series are approved for Grounding and Bonding.


## ATEX and IECEx certified transits

In explosion hazardous environments, it's important to have Ex equipment. MCT Brattberg has a specific program for this areas with products that are tested and certified according to the ATEX directive and the international IECEx. All dimensions are exactly the same as for the other MCT Brattberg components.

For special products please consult MCT Brattberg.



RGPH is certified up to 66,7 bar

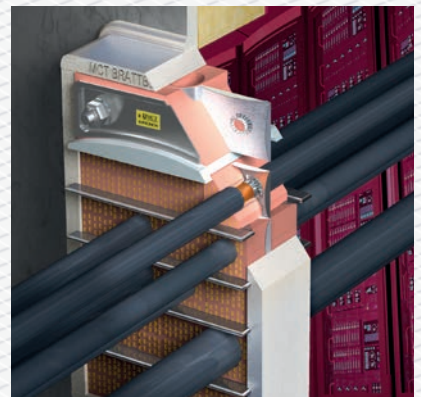

EMC products for grounding and bonding.




Products to protect against explosions.

# RGS



## RGSO WITH REMOVABLE END

RGS is MCT Brattberg's standard transit frame for marine applications. It has a standard internal width of 120 mm (4.72") and is 60 mm (2.36") deep. There are four sizes of RGS, denoted by 2, 4, 6 and 8 depending on their height. They may be used in both vertical and/or horizontal multiple frames.

The RGS is welded into an accurately pre-cut hole in the deck or bulkhead. As with all our frames, RGS is produced in steel, stainless steel, or aluminium. For installations where cables are already in place, specify RGSO, which has a removable end. RGS weight charts can be found on the next page.

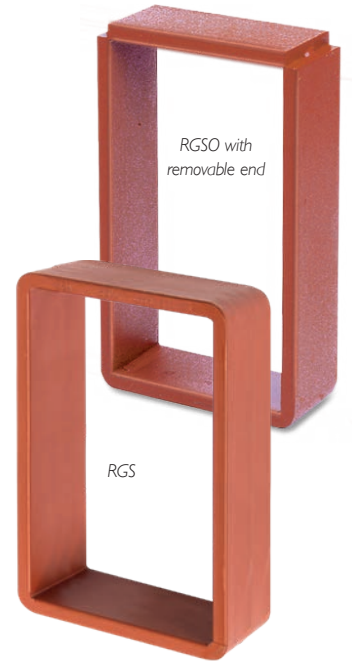

Frame size	Size in mm								Size in inches								
	W (width) Multiple Frames								W (width) Multiple Frames								
	H	x 1	x 2	x 3	x 4	x 5	x 6	x n	H	x 1	x 2	x 3	x 4	x 5	x 6	x n	
RGS-2	121	140,5	271	401,5	532	662,5	793	W = 10 + 130,5 x n	4.76	5.53	10.67	15.81	20.94	26.08	31.2	W = 0.40 + 5.14 x n	
RGS-4	179,5	- "-	- "-	- "-	- "-	- "-	- "-		7.07	- "-	- "-	- "-	- "-	- "-	- "-		- "-
RGS-6	238	- "-	- "-	- "-	- "-	- "-	- "-		9.37	- "-	- "-	- "-	- "-	- "-	- "-		- "-
RGS-8	296,5	- "-	- "-	- "-	- "-	- "-	- "-		11.67	- "-	- "-	- "-	- "-	- "-	- "-		- "-
RGS-2+2	242		- "-	- "-	- "-	- "-	- "-		9.53		- "-	- "-	- "-	- "-	- "-		
RGS-2+4	300,5		- "-	- "-	- "-	- "-	- "-		11.83		- "-	- "-	- "-	- "-	- "-		
RGS-2+6	359		- "-	- "-	- "-	- "-	- "-		14.13		- "-	- "-	- "-	- "-	- "-		
RGS-2+8	417,5		- "-	- "-	- "-	- "-	- "-		16.44		- "-	- "-	- "-	- "-	- "-		
RGS-4+4	359		- "-	- "-	- "-	- "-	- "-		14.13		- "-	- "-	- "-	- "-	- "-		
RGS-4+6	417,5		- "-	- "-	- "-	- "-	- "-		16.44		- "-	- "-	- "-	- "-	- "-		
RGS-4+8	476		- "-	- "-	- "-	- "-	- "-		18.74		- "-	- "-	- "-	- "-	- "-		
RGS-6+6	476		- "-	- "-	- "-	- "-	- "-		18.74		- "-	- "-	- "-	- "-	- "-		
RGS-6+8	534,5		- "-	- "-	- "-	- "-	- "-		21.04		- "-	- "-	- "-	- "-	- "-		
RGS-8+8	593		- "-	- "-	- "-	- "-	- "-		23.35		- "-	- "-	- "-	- "-	- "-		
RGS-2+2	232	140,5	n = number of frames wide. Tolerance single frame: Height ± 1 mm Width ± 0,8 mm Material thickness is 10 mm						9.13	5.53	n = number of frames wide. Tolerance single frame: Height ± 0.04", Width ± 0.03". Material thickness is 0.39".						
RGS-2+4	290,5	- "-							11.44	- "-							
RGS-2+6	349	- "-							13.74	- "-							
RGS-2+8	407,5	- "-							16.04	- "-							
RGS-4+4	349	- "-							13.74	- "-							
RGS-4+6	407,5	- "-							16.04	- "-							
RGS-4+8	466	- "-							18.35	- "-							
RGS-6+6	466	- "-							18.35	- "-							
RGS-6+8	524,5	- "-							20.65	- "-							
RGS-8+8	583	- "-							22.95	- "-							

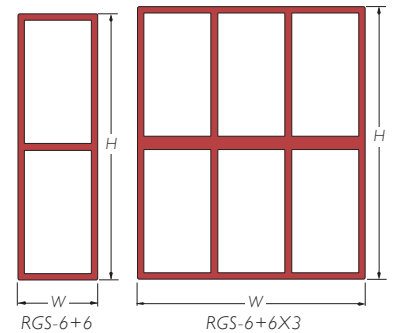
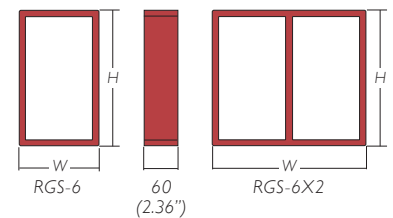




# RGS

## WEIGHT CHART

Standard frames come in four sizes: 2, 4, 6 and 8. They are all the same width. Height differences are shown below. The material is 10 mm (0.39") thick

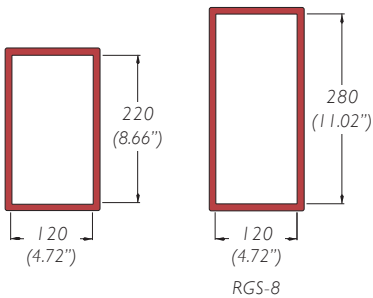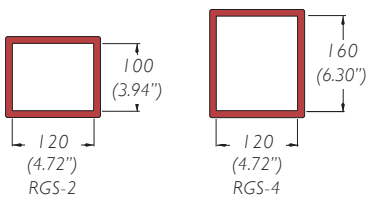

Material	Frame size	Weight in kilograms						Weight in pounds						
		W (width) Multiple Frames						W (width) MultipleFrames						
		x1	x2	x3	x4	x5	x6	x1	x2	x3	x4	x5	x6	
MILD STEEL	RGS-2	2,2	3,9	11,8	7,4	9,2	10,9	4,9	8,6	12,6	32,6	20,3	24,0	
	RGS-4	2,7	4,6	13,6	8,4	10,3	12,2	6,0	10,1	14,3	37,3	22,7	26,9	
	RGS-6	3,2	5,4	15,1	9,8	12,0	14,2	7,1	11,9	16,8	41,0	26,5	31,3	
	RGS-8	3,8	6,3	16,5	11,4	14,0	16,5	8,4	13,9	19,6	44,8	30,9	36,4	
	S355JR S355J2 S355K2	RGS-2+2	3,6	8,1	19,0	15,7	19,5	23,3	7,9	17,9	26,2	52,9	43,0	51,4
		RGS-2+4	4,2	8,8	20,5	16,7	20,7	24,6	9,3	19,4	28,2	56,7	45,6	54,2
		RGS-2+6	4,8	9,5	21,9	17,8	21,9	26,0	10,6	20,9	30,0	60,0	48,3	57,3
	A36 AH36 DH36 EH36	RGS-2+8	5,5	10,3	23,5	19,1	23,5	27,9	12,1	22,7	32,4	64,4	51,8	61,5
		RGS-4+4	4,8	9,5	21,9	17,8	21,9	26,0	10,6	20,9	30,0	60,0	48,3	57,3
		RGS-4+6	5,5	10,3	23,5	19,1	23,5	27,9	12,1	22,7	32,4	64,4	51,8	61,5
RGS-4+8		5,9	11,1	25,1	20,5	25,1	29,8	13,0	24,5	34,8	68,3	55,3	65,7	
STAINLESS STEEL	RGS-2	2,2	4,0	12,1	7,6	9,4	11,2	4,9	8,8	12,8	33,5	20,7	24,7	
	RGS-4	2,8	4,7	13,9	8,6	10,6	12,6	6,2	10,4	14,8	38,1	23,4	27,8	
	RGS-6	3,3	5,5	15,4	10,0	12,3	14,5	7,3	12,1	17,2	41,9	27,1	31,7	
	RGS-8	3,9	6,5	16,9	11,7	14,3	16,9	8,6	14,3	20,1	45,9	31,5	37,3	
	I.4404	RGS-2+2	3,7	8,3	19,5	16,1	20,0	23,9	8,2	18,3	26,9	54,5	44,1	52,7
		RGS-2+4	4,3	9,0	21,0	17,1	21,2	25,2	9,5	19,8	28,9	58,2	46,7	55,6
		RGS-2+6	4,9	9,7	22,4	18,2	22,5	26,7	10,8	21,4	30,9	61,5	49,6	58,9
		RGS-2+8	5,6	10,6	24,2	19,6	24,1	28,6	12,3	23,4	33,3	65,9	53,1	63,1
AISI 316L	RGS-4+4	4,9	9,7	22,4	18,2	22,5	26,7	10,8	21,4	30,9	61,5	49,6	58,9	
	RGS-4+6	5,6	10,6	24,2	19,6	24,1	28,6	12,3	23,4	33,3	65,9	53,1	63,1	
	RGS-4+8	6,0	11,4	25,8	21,0	25,8	30,6	13,2	25,1	35,7	70,1	56,9	67,5	
	RGS-6+6	6,0	11,4	25,8	21,0	25,8	30,6	13,2	25,1	35,7	70,1	56,9	67,5	
ALUMINIUM	RGS-6+8	6,7	12,3	27,5	22,6	27,8	32,9	14,8	27,1	38,6	74,7	61,3	72,5	
	RGS-8+8	7,4	13,2	29,5	24,3	29,9	35,4	16,3	29,1	41,4	80,0	65,9	78,0	
EN AW-6082 EN AW-5086	RGS-2	0,8	1,4	4,1	2,6	3,2	3,8	1,8	3,1	4,4	11,5	7,1	8,4	
	RGS-4	1,0	1,6	4,8	3,0	3,6	4,3	2,2	3,5	5,1	13,0	7,9	9,5	
	RGS-6	1,1	1,9	5,3	3,4	4,2	5,0	2,4	4,2	6,0	14,3	9,3	11,0	
	RGS-8	1,3	2,2	5,8	4,0	4,9	5,8	2,9	4,9	6,8	15,7	10,8	12,8	
	RGS-2+2	1,3	2,8	6,7	5,5	6,9	8,2	2,9	6,2	9,3	18,5	15,2	18,1	
	RGS-2+4	1,5	3,1	7,2	5,9	7,2	8,6	3,3	6,8	9,9	20,1	15,9	19,0	
	RGS-2+6	1,7	3,3	7,7	6,2	7,7	9,1	3,7	7,3	10,6	21,2	17,0	20,1	
	RGS-2+8	1,9	3,6	8,3	6,7	8,3	9,8	4,2	7,9	11,5	22,5	18,3	21,6	
	RGS-4+4	1,7	3,3	7,7	6,2	7,7	9,1	3,7	7,3	10,6	21,2	17,0	20,1	
	RGS-4+6	1,9	3,6	8,3	6,7	8,3	9,8	4,2	7,9	11,5	22,5	18,3	21,6	
	RGS-4+8	2,1	3,9	8,8	7,2	8,8	10,4	4,6	8,6	12,1	24,0	19,4	22,9	
	RGS-6+6	2,1	3,9	8,8	7,2	8,8	10,4	4,6	8,6	12,1	24,0	19,4	22,9	
RGS-6+8	2,3	4,2	9,4	7,7	9,5	11,2	5,1	9,3	13,2	25,6	20,9	24,7		
RGS-8+8	2,5	4,5	10,0	8,3	10,2	12,1	5,5	9,9	14,1	27,3	22,5	26,7		



# RGSF and RGSFB


**RGSF** is a standard RGS transit frame with a flange that allows the frame to be welded into a hole which is slightly larger than the frame.

RGSF comes in the four standard sizes, 2, 4, 6 and 8, and has the standard measurements of the RGS, but with the added width of the flange: 60 mm (2.36") wide and 10 mm (0.39") thick. RGSF can also be installed in multiple frames, see page 17.

For installations where cables are already in place, specify RGSFO which has a removable end.

The **RGSFB** transit frame is similar to RGSF except that it is bolted to the deck or bulkhead. The bolted frames can be used in areas where hot working is prohibited, or when the stress level induced by welding is unacceptable. RGSFB frames are supplied in kit form, complete with drilled holes, bolts, nuts, washers and a gasket or sealing compound. The standard sizes and weights are the same as for RGSF. For installations where cables are already in place, specify RGSFBO which has a bolted removable end.


Frame size	Size in mm								Size in inches							
	W (width) Multiple Frames								W (width) Multiple Frames							
	H	x 1	x 2	x 3	x 4	x 5	x 6	x n	H	x 1	x 2	x 3	x 4	x 5	x 6	x n
RGSF/B-2	241	60,5	391	521.5	652	782.5	913	W = 130+ 130,5 x n	9.49	10.26	15.39	20.53	25.67	30.81	35.94	W = 5.12 + 5.14 x n
RGSF/B-4	299,5	- "	- "	- "	- "	- "	- "		11.79	- "	- "	- "	- "	- "	- "	
RGSF/B-6	358	- "	- "	- "	- "	- "	- "		14.09	- "	- "	- "	- "	- "	- "	
RGSF/B-8	416,5	- "	- "	- "	- "	- "	- "		16.40	- "	- "	- "	- "	- "	- "	
RGSF/B-2+2	362		- "	- "	- "	- "	- "		14.25		- "	- "	- "	- "	- "	
RGSF/B-2+4	420,5		- "	- "	- "	- "	- "		16.56		- "	- "	- "	- "	- "	
RGSF/B-2+6	479		- "	- "	- "	- "	- "		18.86		- "	- "	- "	- "	- "	
RGSF/B-2+8	537,5		- "	- "	- "	- "	- "		21.16		- "	- "	- "	- "	- "	
RGSF/B-4+4	479		- "	- "	- "	- "	- "		18.86		- "	- "	- "	- "	- "	
RGSF/B-4+6	537,5		- "	- "	- "	- "	- "		21.16		- "	- "	- "	- "	- "	
RGSF/B-4+8	596		- "	- "	- "	- "	- "		23.46		- "	- "	- "	- "	- "	
RGSF/B-6+6	596		- "	- "	- "	- "	- "		23.46		- "	- "	- "	- "	- "	
RGSF/B-6+8	654,5		- "	- "	- "	- "	- "		25.77		- "	- "	- "	- "	- "	
RGSF/B-8+8	713		- "	- "	- "	- "	- "		28.07		- "	- "	- "	- "	- "	
RGSF/B-2+2	352	260,5	n = number of frames wide. Tolerance single frame: Height ± 1 mm Width ± 0,8 mm Material thickness is 10 mm  <b>RGSF-frames are normally supplied with straight corners but are also available with round corners with a radius of 63 mm</b>						13.86	10,26	n = number of frames wide. Tolerance single frame: Height ± 0.04", Width ± 0.03". Material thickness is 0.39".  <b>RGSF-frames are normally supplied with straight corners but are also available with round corners with a radius of 2.48".</b>					
RGSF/B-2+4	410,5	- "							16.16	- "						
RGSF/B-2+6	469	- "							18.46	- "						
RGSF/B-2+8	527,5	- "							20.77	- "						
RGSF/B-4+4	469	- "							18.46	- "						
RGSF/B-4+6	527,5	- "							20.77	- "						
RGSF/B-4+8	586	- "							23.07	- "						
RGSF/B-6+6	586	- "							23.07	- "						
RGSF/B-6+8	644,5	- "							25.37	- "						
RGSF/B-8+8	703	- "							27.68	- "						

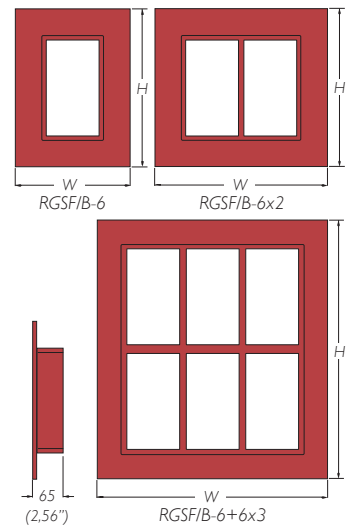





Standard frames come in four sizes: 2, 4, 6 and 8. They are all the same width. Height differences are shown below. The material is 10 mm (0.39") thick.

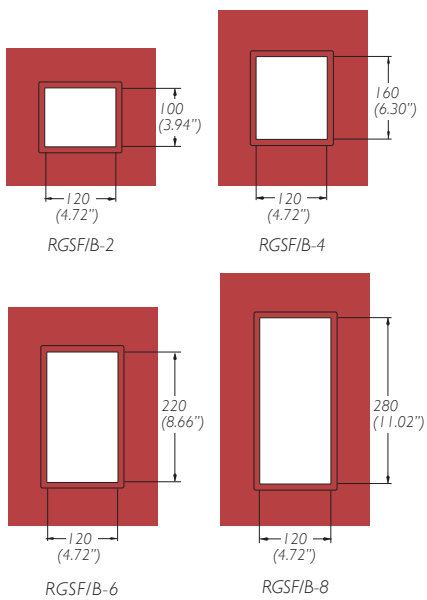

Material	Frame size	Weight in kilograms						Weight in pounds						
		W (width) Multiple Frames						W (width) Multiple Frames						
		x1	x2	x3	x4	x5	x6	x1	x2	x3	x4	x5	x6	
MILD STEEL	RGSF/B-2	5,9	8,9	11,8	14,8	17,8	20,7	13,0	19,6	26,0	32,6	39,2	45,6	
	RGSF/B-4	7,0	10,3	13,6	16,9	20,2	23,4	15,4	22,7	30,0	37,3	44,5	51,6	
	RGSF/B-6	8,0	11,5	15,1	18,6	22,1	25,6	17,6	25,4	33,3	41,0	48,7	56,4	
	RGSF/B-8	9,0	12,8	16,5	20,3	24,0	27,8	19,8	28,2	36,4	44,8	52,9	61,3	
	S355JR S355J2 S355K2	RGSF/B-2+2	8,4	13,9	19,0	24,0	29,1	34,1	18,5	30,6	41,9	52,9	64,2	75,2
		RGSF/B-2+4	9,5	15,3	20,5	25,7	30,9	36,1	20,9	33,7	45,2	56,7	68,1	79,6
		RGSF/B-2+6	10,6	16,5	21,9	27,2	32,6	37,9	23,4	36,4	48,3	60,0	71,9	83,6
		RGSF/B-2+8	11,7	17,9	23,5	29,2	34,8	40,4	25,8	39,5	51,8	64,4	76,7	89,1
	A36 AH36 DH36 EH36	RGSF/B-4+4	10,6	16,5	21,9	27,2	32,6	37,9	23,4	36,4	48,3	60,0	71,9	83,6
		RGSF/B-4+6	11,7	17,9	23,5	29,2	34,8	40,4	25,8	39,5	51,8	64,4	76,7	89,1
		RGSF/B-4+8	12,8	19,2	25,1	31,0	36,9	42,8	28,2	42,3	55,3	68,3	81,4	94,4
		RGSF/B-6+6	12,8	19,2	25,1	31,0	36,9	42,8	28,2	42,3	55,3	68,3	81,4	94,4
RGSF/B-6+8	13,9	20,6	26,9	33,1	39,4	45,6	30,6	45,4	59,3	73,0	86,9	100,5		
RGSF/B-8+8	15,0	22,1	28,7	35,4	42,0	48,6	33,1	48,7	63,3	78,0	92,6	107,1		
STAINLESS STEEL	RGSF/B-2	6,1	9,1	12,1	15,2	18,2	21,2	13,4	20,1	26,7	33,5	40,1	46,7	
	RGSF/B-4	7,2	10,6	13,9	17,3	20,7	24,0	15,9	23,4	30,6	38,1	45,6	52,9	
	RGSF/B-6	8,2	11,8	15,4	19,0	22,7	26,3	18,1	26,0	34,0	41,9	50,0	58,0	
	RGSF/B-8	9,2	13,1	16,9	20,8	24,6	28,5	20,3	28,9	37,3	45,9	54,2	62,8	
	1.4404	RGSF/B-2+2	8,6	14,3	19,5	24,7	29,8	35,0	19,0	31,5	43,0	54,5	65,7	77,2
		RGSF/B-2+4	9,7	15,7	21,0	26,4	31,7	37,0	21,4	34,6	46,3	58,2	69,9	81,6
		RGSF/B-2+6	10,9	16,9	22,4	27,9	33,4	38,9	24,0	37,3	49,4	61,5	73,6	85,8
		RGSF/B-2+8	12,0	18,4	24,2	29,9	35,7	41,4	26,5	40,6	53,4	65,9	78,7	91,3
	AISI 316L	RGSF/B-4+4	10,9	16,9	22,4	27,9	33,4	38,9	24,0	37,3	49,4	61,5	73,6	85,8
		RGSF/B-4+6	12,0	18,4	24,2	29,9	35,7	41,4	26,5	40,6	53,4	65,9	78,7	91,3
		RGSF/B-4+8	13,1	19,7	25,8	31,8	37,9	43,9	28,9	43,4	56,9	70,1	81,4	96,8
		RGSF/B-6+6	13,1	19,7	25,8	31,8	37,9	43,9	28,9	43,4	56,9	70,1	83,6	96,8
RGSF/B-6+8	14,3	21,1	27,5	33,9	40,3	46,7	31,5	46,5	60,6	74,7	88,8	103,0		
RGSF/B-8+8	15,4	22,7	29,5	36,3	43,0	49,8	34,0	50,0	65,0	80,0	94,8	109,8		
ALUMINIUM	RGSF/B-2	2,1	3,1	4,1	5,2	6,2	7,3	4,6	6,8	9,0	11,5	13,7	16,1	
	RGSF/B-4	2,5	3,6	4,8	5,9	7,1	8,2	5,5	7,9	10,6	13,0	15,7	18,1	
	RGSF/B-6	2,8	4,0	5,3	6,5	7,7	9,0	6,2	8,8	11,7	14,3	17,0	19,8	
	RGSF/B-8	3,2	4,5	5,8	7,1	8,4	9,7	7,1	9,9	12,8	15,7	18,5	21,4	
	EN AW-6082 EN AW-5086	RGSF/B-2+2	2,9	4,9	6,7	8,4	10,2	11,9	6,4	10,8	14,8	18,5	22,5	26,2
		RGSF/B-2+4	3,3	5,4	7,2	9,1	10,9	12,7	7,3	11,9	15,9	20,1	24,0	28,0
		RGSF/B-2+6	3,7	5,8	7,7	9,6	11,4	13,3	8,2	12,8	17,0	21,2	25,1	29,3
		RGSF/B-2+8	4,1	6,3	8,3	10,2	12,2	14,1	9,0	13,9	18,3	22,5	26,9	31,1
	RGSF/B-4+4	3,7	5,8	7,7	9,6	11,4	13,3	8,2	12,8	17,0	21,2	25,1	29,3	
	RGSF/B-4+6	4,1	6,3	8,3	10,2	12,2	14,1	9,0	13,9	18,3	22,5	26,9	31,1	
	RGSF/B-4+8	4,5	6,7	8,8	10,9	12,9	15,0	9,9	14,8	19,4	24,0	28,4	33,1	
	RGSF/B-6+6	4,5	6,7	8,8	10,9	12,9	15,0	9,9	14,8	19,4	24,0	28,4	33,1	
RGSF/B-6+8	4,9	7,2	9,4	11,6	13,7	15,9	10,8	15,9	20,7	25,6	30,2	35,1		
RGSF/B-8+8	5,3	7,7	10,0	12,4	14,7	17,0	11,7	17,0	22,0	27,3	32,4	37,5		




# RGSC





RGSC is used in decks and bulkheads which are subjected to higher degrees of stress and heavier loading. The additional, rounded ends help prevent stress cracking. Similar to the RGS frame, it is available in sizes 2, 4, 6 and 8. RGSC can also be supplied as multiple frames. Available in mild steel, stainless steel and aluminium. Special cornerblocks and STG-endpackings with rounded corners are available.



Frame size	Size in mm								Size in inches												
	H	W (width) Multiple Frames							H	W (width) Multiple Frames											
	x 1	x 2	x 3	x 4	x 5	x 6	x n	x 1	x 2	x 3	x 4	x 5	x 6	x n							
RGSC-2	121	140,5	271	401,5	532	662,5	793	W = 130+ 130,5 x n	4.76	5.53	10.67	15.81	20.94	26.08	31.22	W = 0.40 + 5.14 x n					
RGSC-4	179,5	-	-	-	-	-	-		7.07	-	-	-	-	-	-						
RGSC-6	238	-	-	-	-	-	-		9.37	-	-	-	-	-	-						
RGSC-8	296,5	-	-	-	-	-	-		11.67	-	-	-	-	-	-						
RGSC-2+2	242		-	-	-	-	-		9.53		-	-	-	-							
RGSC-2+4	300,5		-	-	-	-	-		11.83		-	-	-	-							
RGSC-2+6	359		-	-	-	-	-		14.13		-	-	-	-							
RGSC-2+8	417,5		-	-	-	-	-		16.44		-	-	-	-							
RGSC-4+4	359		-	-	-	-	-		14.13		-	-	-	-							
RGSC-4+6	417,5		-	-	-	-	-		16.44		-	-	-	-							
RGSC-4+8	476		-	-	-	-	-		18.74		-	-	-	-							
RGSC-6+6	476		-	-	-	-	-		18.74		-	-	-	-							
RGSC-6+8	534,5		-	-	-	-	-		21.04		-	-	-	-							
RGSC-8+8	593		-	-	-	-	-		23.35		-	-	-	-							
RGSC-2+2	232	140,5	n = number of frames wide. Tolerance single frame: Height ± 1 mm Width ± 0.8 mm Material thickness is 10 mm						9.13	5.53	n = number of frames wide. Tolerance single frame: Height ± 0.04", Width ± 0.03" Material thickness is 0.39".										
RGSC-2+4	290,5	-																		11.44	-
RGSC-2+6	349	-																		13.74	-
RGSC-2+8	407,5	-																		16.04	-
RGSC-4+4	349	-																		13.74	-
RGSC-4+6	407,5	-																		16.04	-
RGSC-4+8	466	-																		18.35	-
RGSC-6+6	466	-																		18.35	-
RGSC-6+8	524,5	-																		20.65	-
RGSC-8+8	583	-																		22.95	-



Endpacking, left (multiple frames)

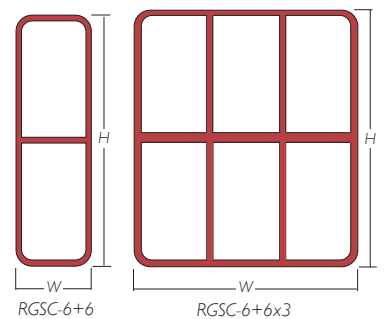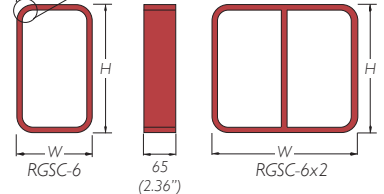


# RGSC

## WEIGHT CHART

Standard frames come in four sizes: 2, 4, 6 and 8. They are all the same width. Height differences are shown below.

The material is 10 mm (0.39") thick.

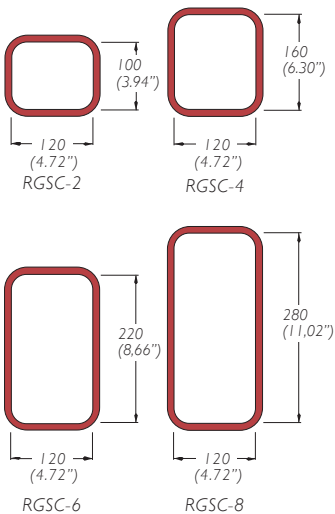

Material	Frame size	Weight in kilograms						Weight in pounds						
		W (width) Multiple Frames						W (width) Multiple Frames						
		x1	x2	x3	x4	x5	x6	x1	x2	x3	x4	x5	x6	
MILD STEEL	RGSC-2	2,2	3,9	5,7	7,4	9,2	10,9	4,9	8,6	12,6	16,3	20,3	24,0	
	RGSC-4	2,7	4,6	6,5	8,4	10,3	12,2	6,0	10,1	14,3	18,5	22,7	26,9	
	RGSC-6	3,2	5,4	7,6	9,8	12,0	14,2	7,1	11,9	16,8	21,6	26,5	31,3	
	RGSC-8	3,8	6,3	8,9	11,4	14,0	16,5	8,4	13,9	19,6	25,1	30,9	36,4	
	S355JR S355J2 S355K2	RGSC-2+2	3,6	8,1	11,9	15,7	19,5	23,3	7,9	17,9	26,2	34,6	43,0	51,4
		RGSC-2+4	4,2	8,8	12,8	16,7	20,7	24,6	9,3	19,4	28,2	36,8	45,6	54,2
		RGSC-2+6	4,8	9,5	13,6	17,8	21,9	26,0	10,6	20,9	30,0	39,2	48,3	57,3
		RGSC-2+8	5,5	10,3	14,7	19,1	23,5	27,9	12,1	22,7	32,4	42,1	51,8	61,5
	A36 AH36 DH36 EH36	RGSC-4+4	4,8	9,5	13,6	17,8	21,9	26,0	10,6	20,9	30,0	39,2	48,3	57,3
		RGSC-4+6	5,5	10,3	14,7	19,1	23,5	27,9	12,1	22,7	32,4	42,1	51,8	61,5
RGSC-4+8		5,9	11,1	15,8	20,5	25,1	29,8	13,0	24,5	34,8	45,2	55,3	65,7	
RGSC-6+6		5,9	11,1	15,8	20,5	25,1	29,8	13,0	24,5	34,8	45,2	55,3	65,7	
RGSC-6+8		6,5	12,0	17,0	22,1	27,1	32,1	14,3	26,5	37,5	48,7	59,7	70,8	
RGSC-8+8		7,2	12,9	18,3	23,7	29,1	34,5	15,9	28,4	40,3	52,2	64,2	76,1	
STAINLESS STEEL	RGSC-2	2,2	4,0	5,8	7,6	9,4	11,2	4,9	8,8	12,8	16,8	20,7	24,7	
	RGSC-4	2,8	4,7	6,7	8,6	10,6	12,6	6,2	10,4	14,8	19,0	23,4	27,8	
	RGSC-6	3,3	5,5	7,8	10,0	12,3	14,5	7,3	12,1	17,2	22,0	27,1	32,0	
	RGSC-8	3,9	6,5	9,1	11,7	14,3	16,9	8,6	14,3	20,1	25,8	31,5	37,3	
	I.4404	RGSC-2+2	3,7	8,3	12,2	16,1	20,0	23,9	8,2	18,3	26,9	35,5	44,1	52,7
		RGSC-2+4	4,3	9,0	13,1	17,1	21,2	25,2	9,5	19,8	28,9	37,7	46,7	55,6
		RGSC-2+6	4,9	9,7	14,0	18,2	22,5	26,7	10,8	21,4	30,9	40,1	49,6	58,9
		RGSC-2+8	5,6	10,6	15,1	19,6	24,1	28,6	12,3	23,4	33,3	43,2	53,1	63,1
	AISI 316L	RGSC-4+4	4,9	9,7	14,0	18,2	22,5	26,7	10,8	21,4	30,9	40,1	49,6	58,9
		RGSC-4+6	5,6	10,6	15,1	19,6	24,1	28,6	12,3	23,4	33,3	43,2	53,1	63,1
		RGSC-4+8	6,0	11,4	16,2	21,0	25,8	30,6	13,2	25,1	35,7	46,3	56,9	67,5
		RGSC-6+6	6,0	11,4	16,2	21,0	25,8	30,6	13,2	25,1	35,7	46,3	56,9	67,5
		RGSC-6+8	6,7	12,3	17,5	22,6	27,8	32,9	14,8	27,1	38,6	49,8	61,3	72,5
		RGSC-8+8	7,4	13,2	18,8	24,3	29,9	35,4	16,3	29,1	41,4	53,6	65,9	78,0
ALUMINIUM	RGSC-2	0,8	1,4	2,0	2,6	3,2	3,8	1,8	3,1	4,4	5,7	7,1	8,4	
	RGSC-4	1,0	1,6	2,3	3,0	3,6	4,3	2,2	3,5	5,1	6,6	7,9	9,5	
	RGSC-6	1,1	1,9	2,7	3,4	4,2	5,0	2,4	4,2	6,0	7,5	9,3	11,0	
	RGSC-8	1,3	2,2	3,1	4,0	4,9	5,8	2,9	4,9	6,8	8,8	10,8	12,8	
	EN AW-6082 EN AW-5086	RGSC-2+2	1,3	2,8	4,2	5,5	6,9	8,2	2,9	6,2	9,3	12,1	15,2	18,1
		RGSC-2+4	1,5	3,1	4,5	5,9	7,2	8,6	3,3	6,8	9,9	13,0	15,9	19,0
		RGSC-2+6	1,7	3,3	4,8	6,2	7,7	9,1	3,7	7,3	10,6	13,7	17,0	20,1
		RGSC-2+8	1,9	3,6	5,2	6,7	8,3	9,8	4,2	7,9	11,5	14,8	18,3	21,6
	EN AW-6082 EN AW-5086	RGSC-4+4	1,7	3,3	4,8	6,2	7,7	9,1	3,7	7,3	10,6	13,7	17,0	20,1
		RGSC-4+6	1,9	3,6	5,2	6,7	8,3	9,8	4,2	7,9	11,5	14,8	18,3	21,6
		RGSC-4+8	2,1	3,9	5,5	7,2	8,8	10,4	4,6	8,6	12,1	15,9	19,4	22,9
		RGSC-6+6	2,1	3,9	5,5	7,2	8,8	10,4	4,6	8,6	12,1	15,9	19,4	22,9
		RGSC-6+8	2,3	4,2	6,0	7,7	9,5	11,2	5,1	9,3	13,2	17,0	20,9	24,7
		RGSC-8+8	2,5	4,5	6,4	8,3	10,2	12,1	5,5	9,9	14,1	18,3	22,5	26,7



# RGSK and RGSbtb

**RGSK** is an extended, standard RGS transit frame, with machined grooves for stayplates and compression plates. The material is 10 mm (0.39") thick on the ends and 12 mm (0.47") thick on the sides. RGSK is available in the four standard sizes: 2, 4, 6 and 8.

RGSK frames are recommended if pooling of water on the transit face makes it necessary to install packing blocks at a certain distance from the deck or bulkhead.

The frame is 120 mm (4.72") deep (as opposed to 60 mm (2.36") on a RGS) and of standard internal width 120 mm (4.72")

It may be used in multiple frames, see page 17.

**RGSbtb** is a double transit which is packed from both sides, enabling on site pressure testing of the penetration. Installations with this transit can be pressure tested from the space between the pack block units. This also conform the jet-fire rating.

An RGSbtb frame can be used to protect cables from water penetration, combined with EMC protection. One side of the packing takes care of water penetration and the other side gives EMC protection.




The frame is 10 mm (0.39") thick on the ends and 12 mm (0.47") thick on the sides. It is 200 mm (7.87") deep. Other dimensions are the same as for the standard RGS.

RGSbtb is available in the four standard sizes: 2, 4, 6, and 8. They may be used in multiple frames.

Frame size	Size in mm							Size in inches						
	H	x 1	x 2	x 3	x 4	x 5	x n	H	x 1	x 2	x 3	x 4	x 5	x n
RGSK/RGSbtb-2	121	144,5	275	405,5	536	666,5		4.76	5.69	10.83	15.96	21.10	26.24	
RGSK/RGSbtb-4	179,5	- - -	- - -	- - -	- - -	- - -	W = 14 + 130,5 x n	7.07	- - -	- - -	- - -	- - -	- - -	W = 0,55" + 5,14 x n
RGSK/RGSbtb-6	238	- - -	- - -	- - -	- - -	- - -		9.37	- - -	- - -	- - -	- - -	- - -	
RGSK/RGSbtb-8	296,5	- - -	- - -	- - -	- - -	- - -		11.67	- - -	- - -	- - -	- - -	- - -	
RGSK/RGSbtb-2+2	232		- - -	- - -	- - -	- - -		9.13		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-2+4	290,5		- - -	- - -	- - -	- - -		11.44		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-2+6	349		- - -	- - -	- - -	- - -		13.74		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-2+8	407,5		- - -	- - -	- - -	- - -		16.04		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-4+4	349		- - -	- - -	- - -	- - -		13.74		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-4+6	407,5		- - -	- - -	- - -	- - -		16.04		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-4+8	466		- - -	- - -	- - -	- - -		18.35		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-6+6	466		- - -	- - -	- - -	- - -		18.35		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-6+8	524,5		- - -	- - -	- - -	- - -		20.65		- - -	- - -	- - -	- - -	
RGSK/RGSbtb-8+8	583		- - -	- - -	- - -	- - -		22.95		- - -	- - -	- - -	- - -	

Tolerance single frame:  
Height ± 1 mm, Width ± 0.8 mm.  
Material thickness is 10 mm.


Tolerance single frame:  
Height ± 0.04", Width ± 0.03"  
Material thickness is 0.39".

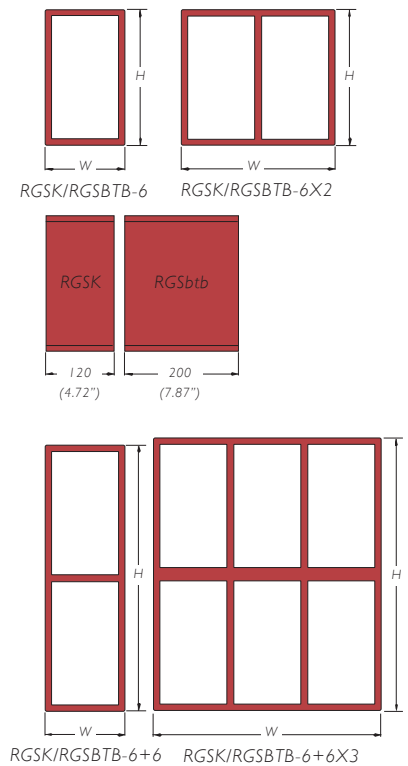

# RGSK


## WEIGHT CHART

Standard frames come in four sizes: 2, 4, 6 and 8. They are all the same width. Height differences are shown below.



RGSK/RGSBTB-2

RGSK/RGSBTB-4



RGSK/RGSBTB-6

RGSK/RGSbtb-8


Material	Frame size	Weight in kilograms						Weight in pounds						
		W (width) Multiple Frames						W (width) Multiple Frames						
		x1	x2	x3	x4	x5	x6	x1	x2	x3	x4	x5	x6	
MILD STEEL	RGSK-2	4,7	7,7	10,7	13,7	16,7	19,7	10,4	17,0	23,6	30,2	36,8	43,4	
	RGSK-4	6,0	9,3	12,6	15,9	19,2	22,5	13,2	20,5	27,8	35,1	42,3	49,6	
	RGSK-6	7,3	10,9	14,5	18,2	21,8	25,4	16,1	24,0	32,0	40,1	48,1	56,0	
	RGSK-8	8,7	12,5	16,4	20,4	24,3	28,2	19,2	27,6	36,2	45,0	53,6	62,2	
	S355JR S355J2 S355K2	RGSK-2+2	7,8	11,9	16,1	20,4	24,6	28,8	17,2	26,2	35,5	45,0	54,2	63,5
		RGSK-2+4	9,2	13,6	18,1	22,6	27,1	31,6	20,3	30,0	39,9	49,8	59,7	69,7
		RGSK-2+6	10,6	15,2	20,0	24,8	29,5	34,3	23,4	33,5	44,1	54,7	65,0	75,6
		RGSK-2+8	11,9	16,9	22,0	27,0	32,1	37,1	26,2	37,3	48,5	59,5	70,8	81,8
	A36 AH36 DH36 EH36	RGSK-4+4	10,6	15,2	20,0	24,8	29,5	34,3	23,4	33,5	44,1	54,7	65,0	75,6
		RGSK-4+6	11,9	16,9	22,0	27,0	32,1	37,1	26,2	37,3	48,5	59,5	70,8	81,8
		RGSK-4+8	13,2	18,4	23,7	29,1	34,4	39,7	29,1	40,6	52,2	64,2	75,8	87,5
		RGSK-6+6	13,2	18,4	23,7	29,1	34,4	39,7	29,1	40,6	52,2	64,2	75,8	87,5
	RGSK-6+8	14,5	20,0	25,5	31,0	36,5	42,5	32,0	44,1	56,2	68,3	80,5	93,7	
	RGSK-8+8	15,9	21,6	27,4	33,2	38,9	45,2	35,1	47,6	60,4	73,2	85,8	99,6	
STAINLESS STEEL	RGSK-2	4,8	7,9	11,0	14,1	17,1	20,2	10,6	17,4	24,3	31,1	37,7	44,5	
	RGSK-4	6,2	9,5	12,9	16,3	19,7	23,1	13,7	20,9	28,4	35,9	43,4	50,9	
	RGSK-6	7,5	11,2	14,9	18,6	22,3	26,0	16,5	24,7	32,8	41,0	49,2	57,3	
	RGSK-8	8,9	12,8	16,8	20,9	24,9	28,9	19,6	28,2	37,0	46,1	54,9	63,7	
	1.4404	RGSK-2+2	8,0	12,2	16,5	20,9	25,2	29,5	17,6	26,9	36,4	46,1	55,6	65,0
		RGSK-2+4	9,4	13,9	18,5	23,2	27,8	32,4	20,7	30,6	40,8	51,1	61,3	71,4
		RGSK-2+6	10,9	15,6	20,5	25,4	30,3	35,2	24,0	34,4	45,2	56,0	66,8	77,6
		RGSK-2+8	12,2	17,3	22,5	27,7	32,8	38,0	26,9	38,1	49,6	61,1	72,3	83,8
	AISI 316L	RGSK-4+4	10,9	15,6	20,5	25,4	30,3	35,2	24,0	34,4	45,2	56,0	66,8	77,6
		RGSK-4+6	12,2	17,3	22,5	27,7	32,8	38,0	26,9	38,1	49,6	61,1	72,3	83,8
		RGSK-4+8	13,5	18,9	24,4	29,8	35,3	40,7	29,8	41,7	53,8	65,7	77,8	89,7
		RGSK-6+6	13,5	18,9	24,4	29,8	35,3	40,7	29,8	41,7	53,8	65,7	77,8	89,7
	RGSK-6+8	14,9	20,5	26,3	32,1	37,8	43,6	32,8	45,2	58,0	70,8	83,3	96,1	
	RGSK-8+8	16,3	22,1	28,2	34,2	40,3	46,3	35,9	48,7	62,2	75,4	88,8	102,1	
ALUMINIUM	RGSK-2	1,7	2,7	3,7	4,8	5,8	6,8	3,7	6,0	8,2	10,6	12,8	15,0	
	RGSK-4	2,1	3,3	4,5	5,6	6,8	7,9	4,6	7,3	9,9	12,3	15,0	17,4	
	RGSK-6	2,6	3,8	5,1	6,4	7,6	8,9	5,7	8,4	11,2	14,1	16,8	19,6	
	RGSK-8	3,1	4,4	5,8	7,2	8,5	9,9	6,8	9,7	12,8	15,9	18,7	21,8	
	EN AW-6082 EN AW-5086	RGSK-2+2	2,7	4,2	5,7	7,2	8,6	10,1	6,0	9,3	12,6	15,9	19,0	22,3
		RGSK-2+4	3,2	4,8	6,4	8,0	9,5	11,1	7,1	10,6	14,1	17,6	20,9	24,5
		RGSK-2+6	3,7	5,3	7,0	8,7	10,3	12,0	8,2	11,7	15,4	19,2	22,7	26,5
		RGSK-2+8	4,2	5,9	7,7	9,5	11,2	13,0	9,3	13,0	17,0	20,9	24,7	28,7
		RGSK-4+4	3,7	5,3	7,0	8,7	10,3	12,0	8,2	11,7	15,4	19,2	22,7	26,5
		RGSK-4+6	4,2	5,9	7,7	9,5	11,2	13,0	9,3	13,0	17,0	20,9	24,7	28,7
		RGSK-4+8	4,6	6,4	8,3	10,2	12,0	13,9	10,1	14,1	18,3	22,5	26,5	30,6
		RGSK-6+6	4,6	6,4	8,3	10,2	12,0	13,9	10,1	14,1	18,3	22,5	26,5	30,6
	RGSK-6+8	5,1	7,0	9,0	11,0	12,9	14,9	11,2	15,4	19,8	24,3	28,4	32,8	
	RGSK-8+8	5,6	7,6	9,7	11,7	13,8	15,8	12,3	16,8	21,4	25,8	30,4	34,8	



# RGSbtb

## WEIGHT CHART

Standard frames come in four sizes: 2, 4, 6 and 8. They are all the same width. Height differences are shown below.

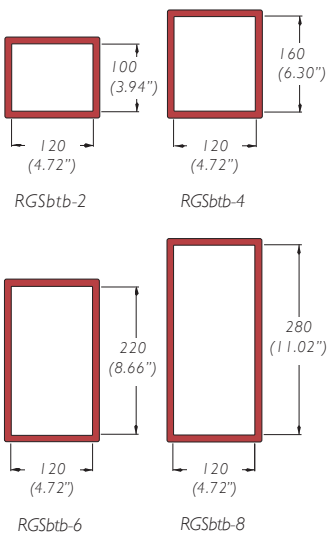

Material	Frame size	Weight in kilograms						Weight in pounds						
		W (width) Multiple Frames						W (width) Multiple Frames						
		x1	x2	x3	x4	x5	x6	x1	x2	x3	x4	x5	x6	
MILD STEEL	RGSbtb-2	7,9	13,0	18,4	7,4	29,1	34,4	17,4	28,7	16,3	52,2	64,2	75,8	
	RGSbtb-4	10,1	15,8	21,7	8,4	33,5	39,4	22,3	34,8	18,5	60,8	73,9	86,9	
	RGSbtb-6	12,4	18,6	25,1	9,8	38,0	44,4	27,3	41,0	21,6	69,4	83,8	97,9	
	RGSbtb-8	14,5	21,2	28,2	11,4	42,2	49,2	32,0	46,7	25,1	77,6	93,0	108,5	
	S355JR S355J2 S355K2	RGSbtb-2+2	13,5	20,9	28,5	15,7	43,7	51,3	29,8	46,1	34,6	79,6	96,3	113,1
		RGSbtb-2+4	15,3	23,3	31,5	16,7	47,8	56,0	33,7	51,4	36,8	87,5	105,4	123,5
		RGSbtb-2+6	17,8	26,3	35,0	17,8	52,4	61,1	39,2	58,0	39,2	96,3	115,5	134,7
		RGSbtb-2+8	20,0	29,1	38,4	19,1	56,9	66,2	44,1	64,2	42,1	105,2	125,4	145,9
	A36 AH36 DH36 EH36	RGSbtb-4+4	17,8	26,3	35,0	17,8	52,4	61,1	39,2	58,0	39,2	96,3	115,5	134,7
		RGSbtb-4+6	20,0	29,1	38,4	19,1	56,9	66,2	44,1	64,2	42,1	105,2	125,4	145,9
		RGSbtb-4+8	22,3	31,9	41,7	20,5	61,3	71,1	49,2	70,3	45,2	113,5	135,1	156,7
		RGSbtb-6+6	22,3	31,9	41,7	20,5	61,3	71,1	49,2	70,3	45,2	113,5	135,1	156,7
RGSbtb-6+8		24,5	34,7	45,1	22,1	65,8	76,2	54,0	76,5	48,7	122,4	145,1	168,0	
RGSbtb-8+8		26,6	37,3	48,2	23,7	70,1	81,0	58,6	82,2	52,2	130,5	154,5	178,6	
STAINLESS STEEL	RGSbtb-2	8,1	13,3	18,8	7,6	29,8	35,3	17,9	29,3	16,8	53,6	65,7	77,8	
	RGSbtb-4	10,4	16,2	22,3	8,6	34,4	40,4	22,9	35,7	19,0	62,4	75,8	89,1	
	RGSbtb-6	12,7	19,1	25,7	10,0	38,9	45,5	28,0	42,1	22,0	71,2	85,8	100,3	
	RGSbtb-8	14,9	21,7	28,9	11,7	43,2	50,4	32,8	47,8	25,8	79,6	95,2	111,1	
	I.4404 AISI 316L	RGSbtb-2+2	13,8	21,4	29,2	16,1	44,8	52,6	30,4	47,2	35,5	81,6	98,8	116,0
		RGSbtb-2+4	15,7	23,9	32,3	17,1	49,0	57,4	34,6	52,7	37,7	89,7	108,0	126,5
		RGSbtb-2+6	18,3	27,0	35,9	18,2	53,7	62,6	40,3	59,5	40,1	98,8	118,4	138,0
		RGSbtb-2+8	20,5	29,8	39,3	19,6	58,4	67,9	45,2	65,7	43,2	107,8	128,7	149,7
	AISI 316L	RGSbtb-4+4	18,3	27,0	35,9	18,2	53,7	62,6	40,3	59,5	40,1	98,8	118,4	138,0
		RGSbtb-4+6	20,5	29,8	39,3	19,6	58,4	67,9	45,2	65,7	43,2	107,8	128,7	149,7
		RGSbtb-4+8	22,9	32,7	42,8	21,0	62,9	72,9	50,5	72,1	46,3	116,4	138,7	160,7
		RGSbtb-6+6	22,9	32,7	42,8	21,0	62,9	72,9	50,5	72,1	46,3	116,4	138,7	160,7
RGSbtb-6+8		25,1	35,6	46,1	22,6	67,5	78,1	55,3	78,5	49,8	125,4	148,8	172,2	
RGSbtb-8+8		27,3	38,2	49,4	24,3	71,8	83,0	60,2	84,2	53,6	133,6	158,3	183,0	
ALUMINIUM	RGSbtb-2	2,8	4,6	6,5	2,6	10,2	12,0	6,2	10,1	5,7	18,3	22,5	26,5	
	RGSbtb-4	3,5	5,5	7,6	3,0	11,7	13,8	7,7	12,1	6,6	21,4	25,8	30,4	
	RGSbtb-6	4,3	6,5	8,8	3,4	13,3	15,5	9,5	14,3	7,5	24,3	29,3	34,2	
	RGSbtb-8	5,1	7,4	9,9	4,0	14,8	17,2	11,2	16,3	8,8	27,1	32,6	37,9	
	EN AW-6082 EN-AW-5086	RGSbtb-2+2	4,7	7,3	10,0	5,5	15,3	18,0	10,4	16,1	12,1	28,0	33,7	39,7
		RGSbtb-2+4	5,4	8,2	11,1	5,9	16,8	19,6	11,9	18,1	13,0	30,6	37,0	43,2
		RGSbtb-2+6	6,2	9,2	12,3	6,2	18,4	21,4	13,7	20,3	13,7	33,7	40,6	47,2
		RGSbtb-2+8	7,0	10,2	13,5	6,7	20,0	23,2	15,4	22,5	14,8	36,8	44,1	51,1
	EN AW-6082 EN-AW-5086	RGSbtb-4+4	6,2	9,2	12,3	6,2	18,4	21,4	13,7	20,3	13,7	33,7	40,6	47,2
		RGSbtb-4+6	7,0	10,2	13,5	6,7	20,0	23,2	15,4	22,5	14,8	36,8	44,1	51,1
		RGSbtb-4+8	7,8	11,2	14,6	7,2	21,5	24,9	17,2	24,7	15,9	39,9	47,4	54,9
		RGSbtb-6+6	7,8	11,2	14,6	7,2	21,5	24,9	17,2	24,7	15,9	39,9	47,4	54,9
RGSbtb-6+8		8,6	12,2	15,8	7,7	23,1	26,7	19,0	26,9	17,0	43,0	50,9	58,9	
RGSbtb-8+8		9,3	13,1	16,9	8,3	24,6	28,4	20,5	28,9	18,3	45,9	54,2	62,6	

# RGSR

RGSR is used in decks and bulkheads which are subjected to higher degrees of stress and heavier loading. The additional, rounded ends help prevent stress cracking. The radius of the ends is 70 mm (2.76") on otherwise standard 2, 4, 6 and 8 model RGS frames. RGSR can be used in multiple frames. For weight charts and installation details, singularly or in multiple frames, contact MCT Brattberg.




# Multiple Frames



## HORIZONTAL MULTIPLE FRAMES


Horizontal multiple frames are described by listing the frame type and size x the desired number of horizontal openings.

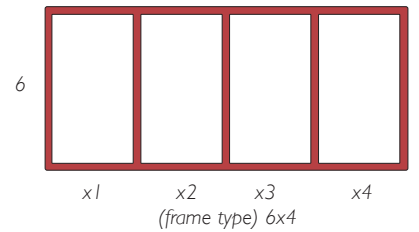

Designation:

## VERTICAL MULTIPLE FRAMES


Vertical multiple frames are described by listing the bottom frame type and size + the next frame type and size.

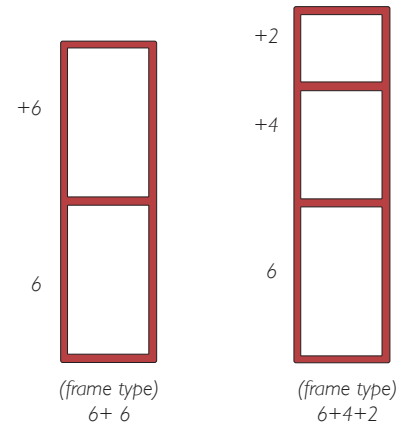

Designation (starting at bottom):

## VERTICAL AND HORIZONTAL MULTIPLE FRAMES

List the entire vertical frames x the desired number of horizontal repetitions.

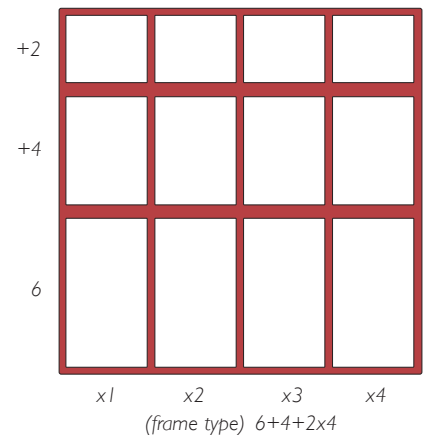

Designation (starting at bottom):


NOTE: All multiple frame designations must be preceded by the frame type.



# RGP-round holes

**RGP** is a Lycron transit frame for assembly in drilled holes, pipes or in MCT Brattberg sleeves (see page 41 for dimensions of pipes and drilled holes). It is available in eight sizes (see table) and is packed with insert blocks. The metal parts are galvanized or stainless steel.

**RGPO** is a Lycron frame with open sides intended for installation in holes where cables have already been installed. This is also available in seven sizes.

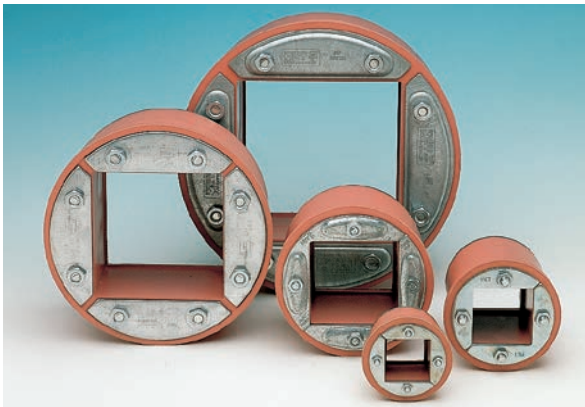

RGP is a circular seal for holes or pipes.



RGPO is an openable RGP frame.

Weight in kilograms		Weight in pounds	
RGP 50/L60	0,25	RGP 2"/L 2.36	0.6
RGP 50/L30	0,11	RGP 2"/L 1.18	0.2
RGP 70	0,4	RGP 3"	0.9
RGP 100	0,7	RGP 4"	1.5
RGP 125	1,0	RGP 5"	2.2
RGP 150	1,8	RGP 6"	4.0
RGP 200	3,0	RGP 8"	6.6
RGP 300	7,5	RGP 11.8"	16.5

Dimensions in mm (inches)		
FRAME SIZE	PACKING AREA	DEPTH AND DIAMETER
RGP 50/L60 (2"/L2.36)		
RGP 50/L30 (2"/L1.18)		
RGP 70 (3")		
RGP 100 (4")		
RGP 125 (5")		
RGP 150 (6")		
RGP 200 (8")		
RGP 300 (11.8")		

# Sleeves for RGP and RGPO Frames

MCT Brattberg standard sleeves are available in seven sizes, for welding or bolting to the structure.

The standard materials are mild steel, stainless steel and aluminium.

SFRB is also available in an open version (SFRBO).

SFR/SFRB are supplied in kits, complete with drilled holes, bolts, nuts washers and a gasket or sealing compound.



SFRBO




SFR


SFRB

S


TYPE S WITHOUT FLANGE



TYPE SFR WITH ROUND FLANGE



TYPE SFRB WITH ROUND FLANGE AND PRE DRILLED HOLES



Type S without flange							
Type/Dimension	O/D mm	L mm	Weight kg	Type/Dimension	O/D inch	L inch	Weight lbs
S 50/L30	63	35	0,3	32"/L 1.18	2.5	1.2	0.7
S 50/L60	63	70	0,6	32"/L 2.36	2.5	2.8	1.3
S 70	83	70	0,8	S-3	3.52	3.2	1.8
S 100	114	82	1,3	S-4	4.55	3.2	1.8
S 125	139	82	1,6	S-5	5.55	3.2	1.8
S 150	164	82	1,9	S-6	6.55	3.2	1.8
S 200	214	82	2,6	S-8	8.55	3.2	1.8
S 300	316	85	4,5	S-11.8	12.44	3.4	9.9

Dimensions for pipes and drilled holes see page 41

Dimensions for pipes and drilled holes see page 41

Sleeves can also be supplied to US Standard Diameters.

Type SFR and SFRB with round flange													
Type/Dimension	O/D mm	L mm	A mm	E mm	Weight kg	Qty of holes	Type/Dimension	O/D inch	L inch	A inch	E inch	Weight lbs	Qty of holes
SFR/SFRB 50/L30	63	38	145	9	0,9	4	SFR/SFRB 2"/L 1.18	2.48	1.5	6	0.35	2.0	4
SFR/SFRB 50/L60	63	73	145	9	1,2	4	SFR/SFRB 2"/L 2.36	2.48	2.9	6	0.35	2.6	4
SFR/SFRB 70	83	74	185	9	2,1	4	SFR/SFRB 3"	3.27	2.9	7.5	0.35	4.6	4
SFR/SFRB 100	114	86	215	9	2,9	4	SFR/SFRB 4"	4.49	3.4	8.5	0.35	6.4	4
SFR/SFRB 125	140	86	240	9	3,7	4	SFR/SFRB 5"	5.51	3.4	9.5	0.35	8.2	4
SFR/SFRB 150	164	86	264	11	4,2	6	SFR/SFRB 6"	6.46	3.4	10.5	0.43	9.3	6
SFR/SFRB 200	214	86	315	11	5,1	6	SFR/SFRB 8"	8.43	3.4	12.5	0.43	11.2	6
SFR/SFRB 300	316	89	398	11	8,5	10	SFR/SFRB 11.8"	12.44	3.5	15.7	0.43	18.7	10

Dimensions for pipes and drilled holes see page 41

Dimensions for pipes and drilled holes see page 41

# Components

## COMPRESSION PLATE

Usually assembled above top row of blocks. The plate bolt is tightened to compress blocks around cables, while providing room for STG endpacking. Comes in GRP, glassfibre reinforced polyester.



## STAYPLATE

To be placed between each row of blocks. Stayplates simplify installation, increase stability and anchor blocks within the frame. Plates come in galvanized or stainless steel, and aluminium.

Stayplate



Stayplate 60




## LUBRICANT

30 g / 25 ml (0.07 pound / 0.85 oz)  
For easier installation and must be used with pressure-tight installation,



## STG-ENDPACKING

Installed between compression plate and the top of the frame, completing the seal. Made of Lycron with galvanized or stainless steel fittings.

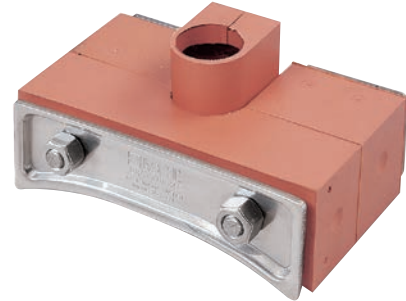


## PTG-PRESSWEDGE

May be placed anywhere in the frame. Made of Lycron, with stainless steel fittings. Must always be installed in combination with a stayplate.

PTG Hex

PTG Allen

PTG Allen 60

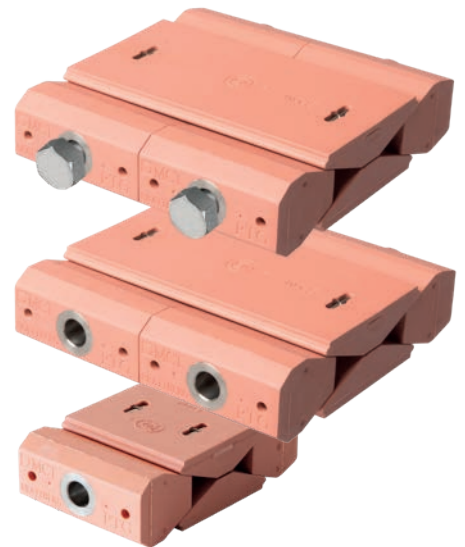


Component	Weight in kilograms	Weight in pounds
Compression Plate	0.24	0.53
STG	0.6	1.32
PTG 120 Hex and Allen	0.83	1.81
PTG 60 Hex and Allen	0.41	0.9
Stayplate	0.13	0.29
Stayplate 60	0.02	0.04



# Accessories

## SPACER TOOL

Simplifies insertion of last row of blocks.  
20, 30, 40 mm (0.79", 1.18", 1.57")

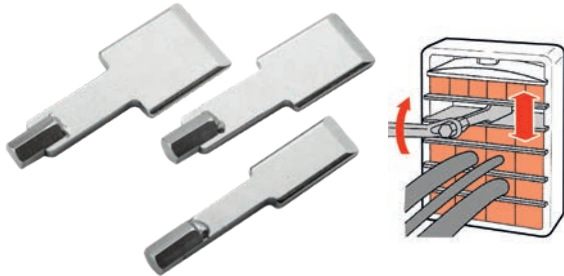

## BLOCK SELECTOR

For cable/pipe measurement.

STD insert



AddBlock



HandiBlock



## RING SPANNER.

For end packer & RGP installation.



## CABLE SEPARATOR

Support cables during installation.




## PACKING TOOL

Compresses insert block to hold cable/pipes during partial installations.



## END PACKER PULLER

For re-entry into system.

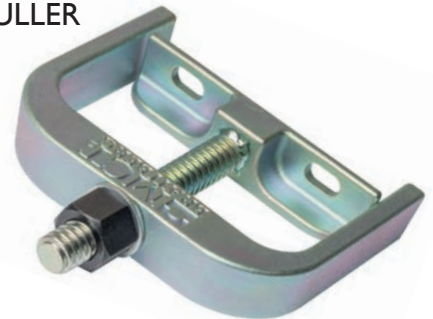

## QUICK RELEASE SPANNER

For Compression Plate Installation.



## BLANKING PLATE

Seals frame prior to block installation.

Ingress protection IP65/66





# Planning the Packing Space

The space in a frame, which can be used exclusively for holding Insert Blocks, is called the packing space. In the RGS-type frames the compression system always occupies 40 mm (1.57") of each frame.

In the RGP frames no compression system or stayplates are necessary. Therefore the packing space consists of the entire interior area of the frame.

Tables to help you determine which Insert Block to use are on pages 27 (the standard Blocks) 28 (AddBlocks) and 30 (HandiBlocks).

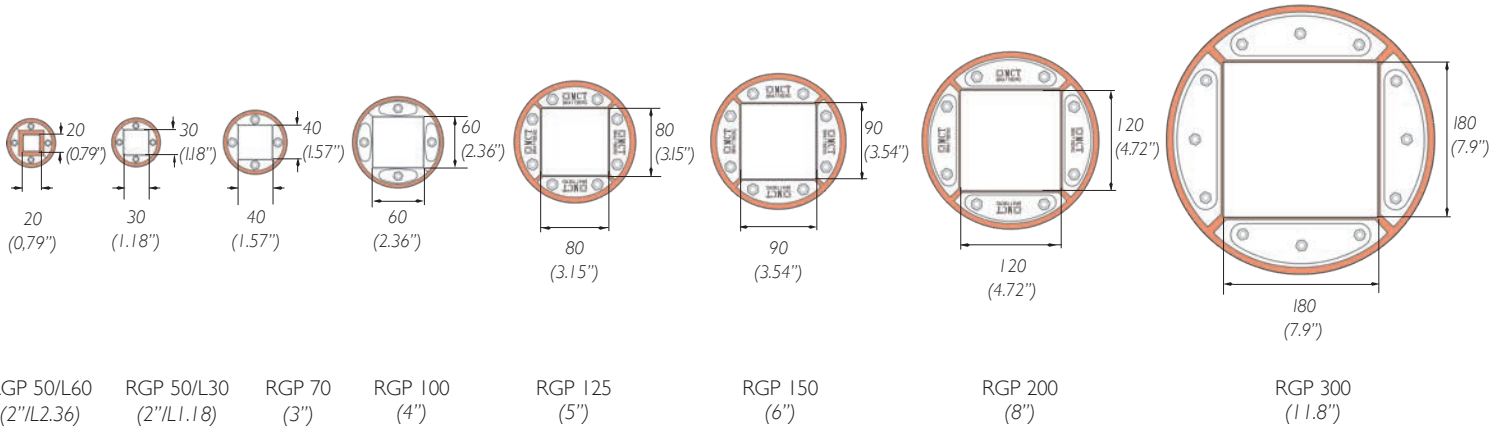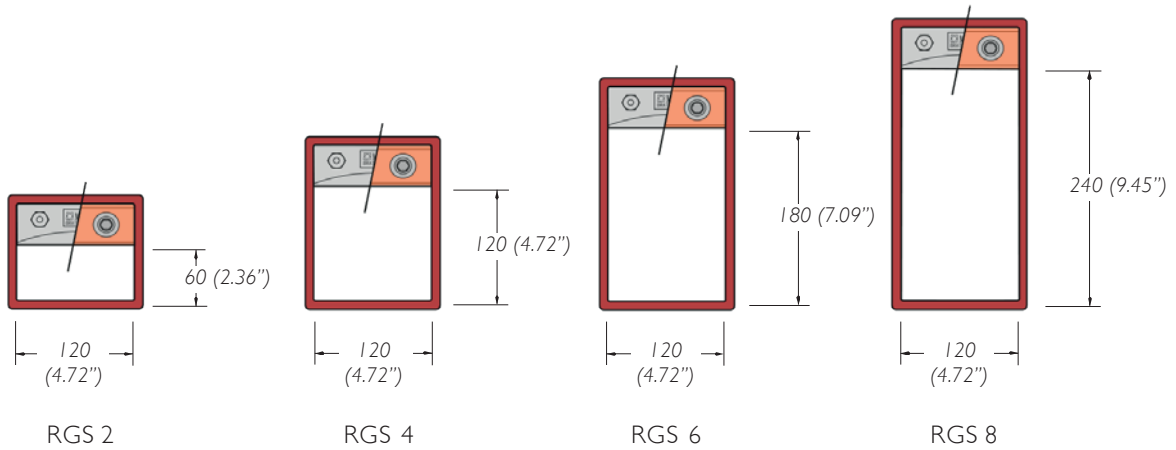

RGP 50/L60  
(2"/L2.36)

RGP 50/L30  
(2"/L1.18)

RGP 70  
(3")


RGP 100  
(4")


RGP 125  
(5")


RGP 150  
(6")

RGP 200  
(8")


RGP 300  
(11.8")

RGS maximum number of cables and pipes							
	Block sizes						
	15	20	30	40	60	90	120
Frame sizes	Maximum number of cables and pipes						
RGS 2	32	18	8	3	2	-	-
RGS 4	64	36	16	9	4	1	1
RGS 6	96	54	24	12	6	2	1
RGS 8	128	72	32	18	8	2	2

RGP maximum number of cables and pipes							
	Block sizes						
	15	20	30	40	60	90	120
Frame sizes	Maximum number of cables and pipes						
RGP 50/L30 RGP (2"/L2.36)	4	1	1	-	-	-	-
RGP 50/L60 RGP(2"/L1.18)	1	1	-	-	-	-	-
RGP 70 RGP (3")	4	4	1	1	-	-	-
RGP 100 RGP (4")	16	9	4	1	1	-	-
RGP 125 RGP (5")	25	16	4	1	1	-	-
RGP 150 RGP (6")	36	16	9	4	1	1	-
RGP 200 RGP (8")	64	36	16	9	4	1	1

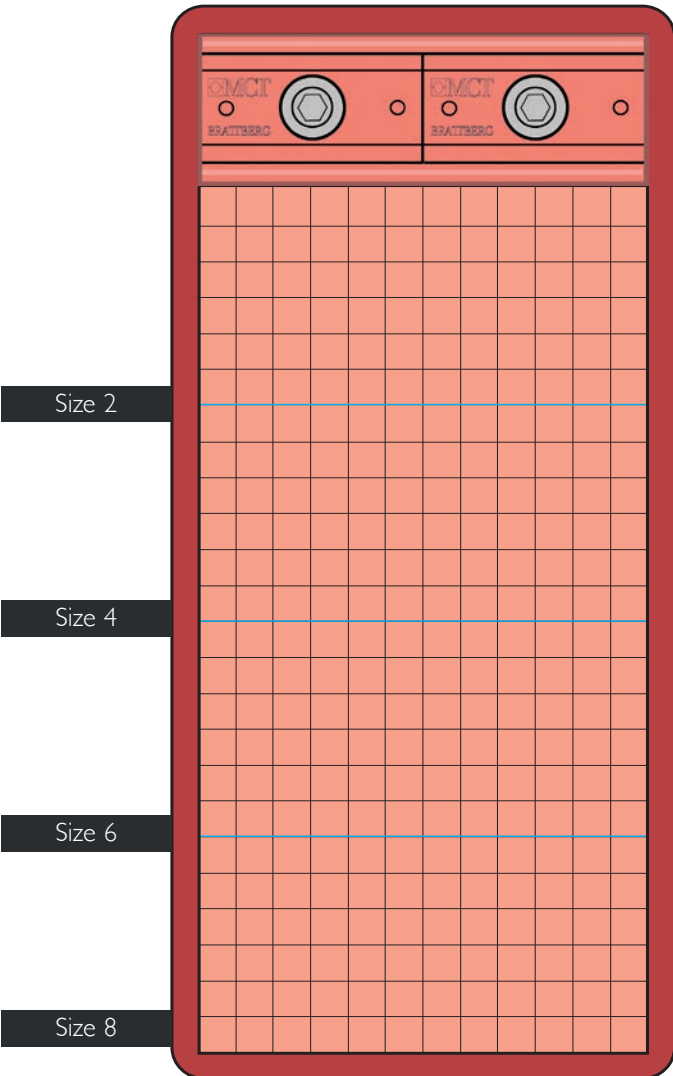

A couple of examples of pack plans (RG Plan) are shown here. RGS to the left and RGP below. The largest cables are placed at the bottom.

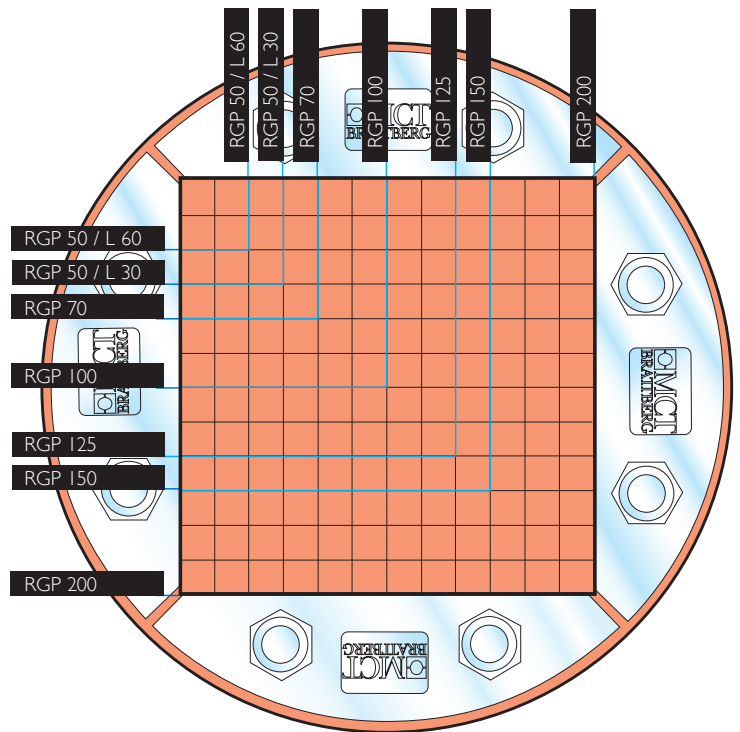

Combination frame width compared with width of cable tray						
Cable type		Cable tray width in mm/inches				
		150/6"	200/8"	300/12"	400/16"	600/24"
Signal	Frame size	6	6x2	6x3	6x4	6x5
Power		4	4x2	4x3	4x4	4x5
Combination		6	6x2	6x3	6x4	6x5



# Packing Plan

RGS, RGSF, RGSK, RGSR and RGSbtb


The correct frame size can be determined by using this plan.

The notes to the right side of the plan represent the available packing space for frame size 2, 4, 6 and 8.

It is not necessary to show stay plates, compression plates or endpackings since sufficient space for these is already reserved in the tables.

The notes to the left side of the plan represent the available packing space for the different RGP frames.

Dimensions of Standard Insert Blocks, AddBlocks, Plugs, HandiBlock and U-blocks, see pages 26-31.

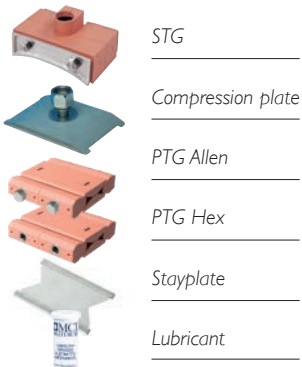

Blocks

---



---



---




---



---

- RGP 50/L60 (2"/L.2.36)
- RGP 50/L30 (2"/L.1.18)
- RGP 70 (3")
- RGP 100 (5")
- RGP 125 (6")
- RGP 150 (7")
- RGP 200 (8")

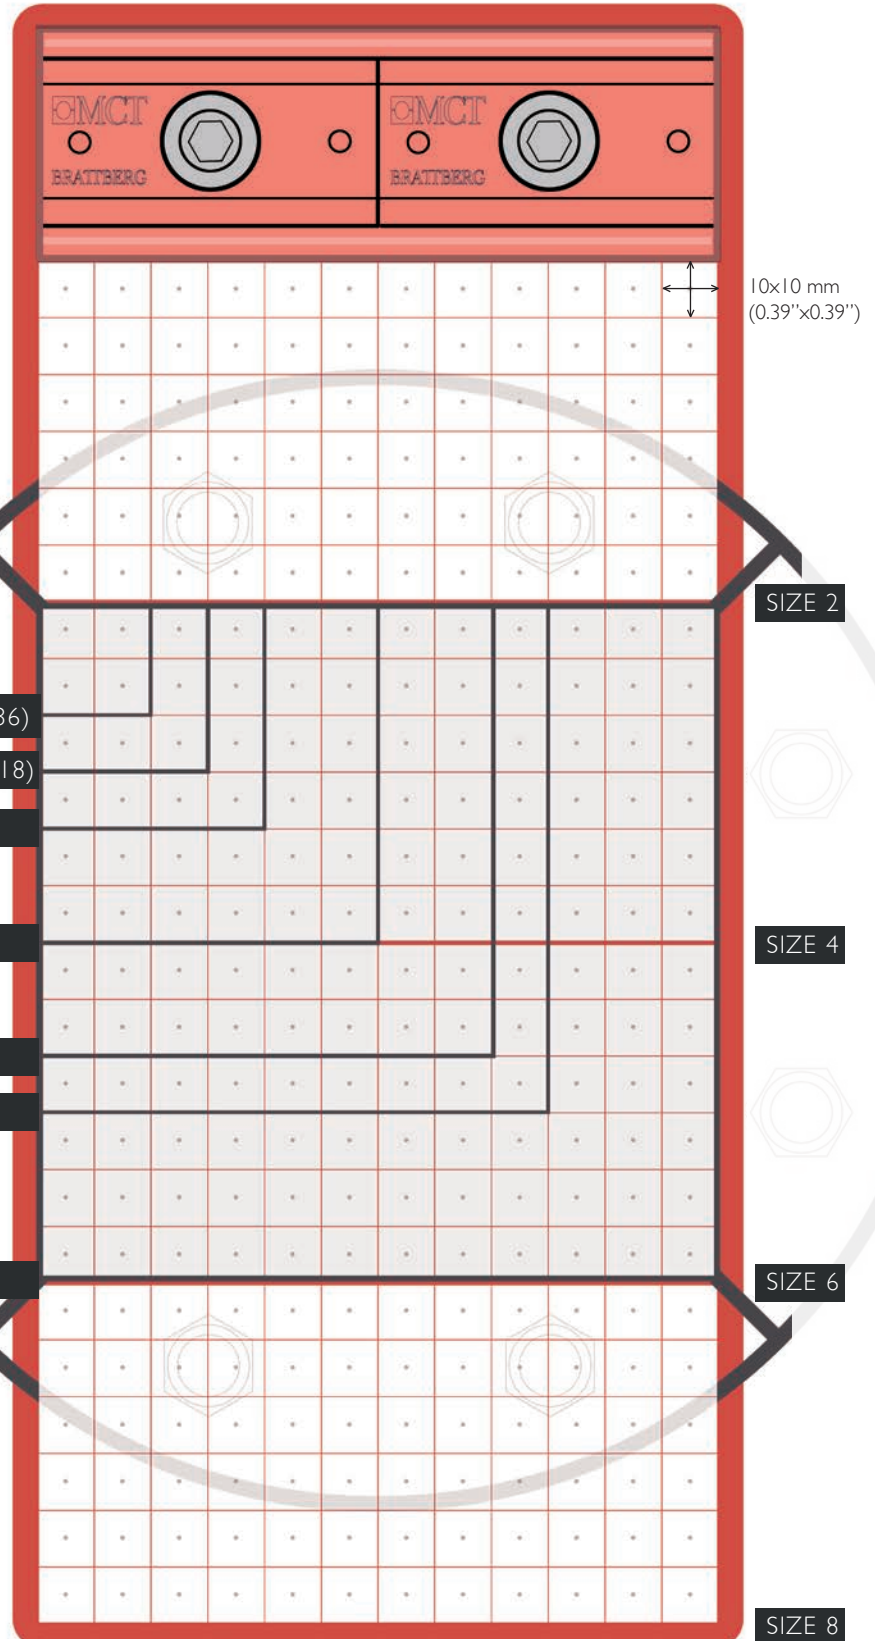

# RGPlan

## WEB-BASED DESIGN SOFTWARE

Configure cable/pipe penetrations quickly and easily with

our Web-based design software. Its faster and simpler than time-consuming manual methods. It's perfect solution for busy engineers/designers.

It's free and completely web based. Log in to access your projects anywhere. You can share projects with team members to allow them to edit and configure the transits. Built with smart functions, to help reduce your transit planning time. Simply input the transit requirements and RGPlan automatically configures the seal, along with all necessary components, Insert Blocks, stayplates and compression systems – at the touch of a button. The program now offers many unique editing features, multiple

Web-based design software gives a lot of opportunities, including following:

- Create a favorite list of your most used cables for easy access.
- Import new cables from Excel buy using a cable list template.
- Categorize and highlight placed cables for easy overview, for example to separate high voltage cables and sensitive data cables.
- Add team members to a project to allow them to edit and configure the transits within the project.
- Every progress you make is autosaved in realtime.
- Download project reports, Bom:s and drawings at any time.

Web-based design software

The service is free of charge and no download is required.

[rgplan.mctbrattberg.com](http://rgplan.mctbrattberg.com)




# Standard Blocks

Our range of blocks accommodates cables between 3,5 - 101,5 mm (0.14-4.0") in diameter. It is important that the insert block is the right size, with respect to the cable, to ensure a proper seal.

Measure the cable diameters carefully and choose insert blocks accordingly. With the sizing chart on next page you can choose the correct size of insert blocks.

Blocks are referred to by their width (A) and hole diameter (B). Thus a block with a width of 15 mm (0.59") and a hole diameter of 4 mm (0.16") is referred to as 15/4. This designation is moulded into the block.


Certain markets denote Insert Blocks in pairs. Please consult MCT Brattberg for this information.

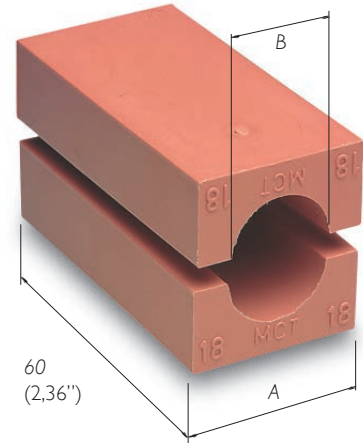

# SpareBlocks

Spare room in each frame is filled out with solid insert blocks. Called spares, they bear the designation A/0.


Blocks are referred to by their width (A), followed by the designation /0 (indicating solid). Thus a block with a width and height of 15 mm (0.59") is referred to as 15/0. The length of insert blocks is always 60 mm (2.36")

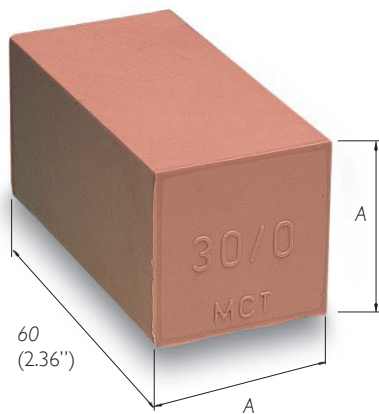

Block size in mm Width (A) = Height (A)	Size in inches	BLOCK DESIGNATION
5 x 5 Only in strips of 24 pcs	0.20" x 0.20" Only in strips of 24 pcs	24x5/0
10 x 10 Only in strips of 12 pcs	0.39" x 0.39" Only in strips of 12 pcs	12x10/0
15 x 15	0.59" x 0.59"	15/0
20 x 20	0.79" x 0.79"	20/0
30 x 30	1.18" x 1.18"	30/0
40 x 40	1.58" x 1.58"	40/0
60 x 60	2.36" x 2.36"	60/0
90 x 30	3.54" x 1.18"	90x30/0




CABLE DIAM.	A (mm)				B	CABLE DIAM.	A (mm)			B	CABLE DIAM.	A (mm)		B
	15	20	30	40			40	60	90			90	120	
3.5-4.5	15/4	20/4			4	25.5-27.5	40/26			26	55.5-57.5	90/56		56
4.5-5.5	15/5	20/5			5	27.5-29.5	40/28			28	57.5-59.5	90/58		58
5.5-6.5	15/6	20/6			6	29.5-31.5	40/30			30	59.5-61.5	90/60		60
6.5-7.5	15/7	20/7			7	31.5-33.5	40/32	60/32		32	61.5-63.5	90/62		62
7.5-8.5	15/8	20/8			8	33.5-35.5	40/34	60/34		34	63.5-65.5	90/64		64
8.5-9.5	15/9	20/9			9	35.5-37.5		60/36		36	65.5-67.5	90/66		66
9.5-10.5		20/10			10	37.5-39.5		60/38		38	67.5-69.5	90/68		68
10.5-11.5		20/11			11	39.5-41.5		60/40		40	69.5-71.5	90/70		70
11.5-12.5		20/12	30/12		12	41.5-43.5		60/42		42	71.5-73.5	120/72	72	
12.5-13.5		20/13	30/13		13	43.5-45.5		60/44		44	73.5-75.5	120/74	74	
13.5-14.5		20/14	30/14		14	45.5-47.5		60/46		46	75.5-77.5	120/76	76	
14.5-15.5			30/15		15	47.5-49.5		60/48		48	77.5-79.5	120/78	78	
15.5-16.5			30/16		16	49.5-51.5	60/50	90/50		50	79.5-81.5	120/80	80	
16.5-17.5			30/17		17	51.5-53.5	60/52	90/52		52	81.5-83.5	120/82	82	
17.5-18.5			30/18		18	53.5-55.5	60/54	90/54		54	83.5-85.5	120/84	84	
18.5-19.5			30/19		19						85.5-87.5	120/86	86	
19.5-20.5			30/20		20						87.5-89.5	120/88	88	
20.5-21.5			30/21		21						89.5-91.5	120/90	90	
21.5-22.5			30/22	40/22	22						91.5-93.5	120/92	92	
22.5-23.5			30/23	40/22	23						93.5-95.5	120/94	94	
23.5-24.5			30/24	40/24	24						95.5-97.5	120/96	96	
24.5-25.5				40/24	24						97.5-99.5	120/98	98	
											99.5-101.5	120/100	100	



Blocks are referred to by their width(A) and hole diameter (B). Thus a module with a width of 15 mm and a hole diameter of 4 mm is referred to as 15/4.

CABLE DIAM.	A (inches)				B	CABLE DIAM.	A (inches)			B	CABLE DIAM.	A (inches)		B
	0.59	0.79	1.18	1.58			1.58	2.36	3.55			3.55	4.73	
0.14-0.18	15/4	20/4			0.16	1.00-1.10	40/26			1.02	2.18-2.26	90/56		2.21
0.18-0.22	15/5	20/5			0.20	1.10-1.16	40/28			1.10	2.26-2.34	90/58		2.29
0.22-0.26	15/6	20/6			0.24	1.16-1.24	40/30			1.18	2.34-2.42	90/60		2.36
0.26-0.30	15/7	20/7			0.28	1.24-1.32	40/32	60/32		1.26	2.42-2.50	90/62		2.44
0.30-0.33	15/8	20/8			0.31	1.32-1.40	40/34	60/34		1.34	2.50-2.58	90/64		2.52
0.33-0.37	15/9	20/9			0.35	1.40-1.48		60/36		1.42	2.58-2.66	90/66		2.60
0.37-0.41		20/10			0.39	1.48-1.55		60/38		1.50	2.66-2.74	90/68		2.68
0.41-0.45		20/11			0.43	1.55-1.63		60/40		1.58	2.74-2.81	90/70		2.76
0.45-0.49		20/12	30/12		0.47	1.63-1.71		60/42		1.65	2.81-2.89	120/72	2.84	
0.49-0.53		20/13	30/13		0.51	1.71-1.79		60/44		1.73	2.89-2.97	120/74	2.92	
0.53-0.57		20/14	30/14		0.55	1.79-1.87		60/46		1.81	2.97-3.05	120/76	2.99	
0.57-0.61			30/15		0.59	1.87-1.95		60/48		1.89	3.05-3.13	120/78	3.07	
0.61-0.65			30/16		0.63	1.95-2.03	60/50	90/50		1.97	3.13-3.21	120/80	3.15	
0.65-0.69			30/17		0.67	2.03-2.11	60/52	90/52		2.05	3.21-3.29	120/82	3.23	
0.69-0.73			30/18		0.71	2.11-2.18	60/54	90/54		2.13	3.29-3.36	120/84	3.31	
0.73-0.77			30/19		0.75						3.36-3.44	120/86	3.39	
0.77-0.81			30/20		0.79						3.44-3.52	120/88	3.47	
0.81-0.85			30/21		0.83						3.52-3.60	120/90	3.55	
0.85-0.89			30/22	40/22	0.87						3.60-3.68	120/92	3.62	
0.89-0.93			30/23	40/22	0.91						3.68-3.76	120/94	3.70	
0.93-1.00			30/24	40/24	0.95						3.76-3.84	120/96	3.78	
				40/24							3.84-3.92	120/98	3.86	
											3.92-3.99	120/100	3.94	



Blocks are referred to by their width(A) and hole diameter (B). Thus a module with a width of 0.59" and a hole diameter of 0.16" is referred to as 15/4.

Weight in grams per half							
BLOCK	W	BLOCK	W	BLOCK	W	BLOCK	W
24 x 5/0	58	20/11	13	40/30	42	90/62	239
12 x 10/0	113	20/12	13	40/32	37	90/64	229
15/0	20	20/13	12	40/34	32	90/66	220
20/0	38	20/14	11	60/32	131	90/68	211
30/0	84	30/12	36	60/34	127	90/70	204
40/0	150	30/13	36	60/36	122	120/72	494
60/0	338	30/14	35	60/38	116	120/74	485
90x30/0	279	30/15	34	60/40	110	120/76	472
15/4	10	30/16	33	60/42	104	120/78	462
15/5	10	30/17	31	60/44	98	120/80	448
15/6	10	30/18	30	60/46	91	120/82	437
15/7	10	30/19	28	60/48	84	120/84	425
15/8	9	30/20	27	60/50	77	120/86	415
15/9	8	30/21	25	60/52	59	120/88	403
20/4	18	30/22	24	60/54	61	120/90	385
20/5	18	30/23	22	90/50	287	120/92	368
20/6	17	30/24	21	90/52	279	120/94	360
20/7	17	40/22	57	90/54	273	120/96	351
20/8	16	40/24	54	90/56	262	120/98	332
20/9	15	40/26	50	90/58	255	120/100	313
20/10	14	40/28	47	90/60	243	120/108	243

Weight in oz per half							
BLOCK	W	BLOCK	W	BLOCK	W	BLOCK	W
24 x 5/0	2.0	20/11	0.5	40/30	1.5	90/62	8.4
12 x 10/0	4.0	20/12	0.5	40/32	1.3	90/64	8.1
15/0	0.7	20/13	0.4	40/34	1.1	90/66	7.7
20/0	1.3	20/14	0.4	60/32	4.7	90/68	7.4
30/0	3.0	30/12	1.3	60/34	4.5	90/70	7.2
40/0	5.3	30/13	1.3	60/36	4.3	120/72	17.4
60/0	11.9	30/14	1.2	60/38	4.1	120/74	17.1
90x30/0	9.8	30/15	1.2	60/40	3.9	120/76	16.6
15/4	0.4	30/16	1.2	60/42	3.7	120/78	16.3
15/5	0.4	30/17	1.1	60/44	3.5	120/80	15.8
15/6	0.4	30/18	1.0	60/46	3.2	120/82	15.4
15/7	0.4	30/19	1.0	60/48	3.0	120/84	15.0
15/8	0.3	30/20	1.0	60/50	2.7	120/86	14.6
15/9	0.3	30/21	0.9	60/52	2.4	120/88	14.2
20/4	0.6	30/22	0.8	60/54	2.2	120/90	13.6
20/5	0.6	30/23	0.8	90/50	10.1	120/92	13.0
20/6	0.6	30/24	0.7	90/52	9.8	120/94	12.7
20/7	0.6	40/22	2.0	90/54	9.6	120/96	12.3
20/8	0.6	40/24	1.9	90/56	9.2	120/98	11.7
20/9	0.5	40/26	1.8	90/58	9.0	120/100	11.0
20/10	0.5	40/28	1.7	90/60	8.6	120/108	8.6


# AddBlock

There are eleven different sizes of AddBlock. By tearing off the wing-like inserts, which are of varying thickness, and inserting them in the main block it is possible to accommodate 66 different cable and pipe dimensions, from 3.5 mm (0.14") to 69.5 mm (2.74"). The inserts are fitted with a locating ridge that fits exactly into furrows in the main block. These stop the block from "telescoping".

A seal using AddBlocks is as secure and tight as one using standard blocks. Both types can be combined in a transit, which makes the MCT Brattberg seal system very flexible.

*The AddBlocks basic dimension is given at bottom slot center, and that's the maximum cable dimension the block is designed for.*


*Dimensions are also clearly marked on the four insert sheets. Simply select, tear off and insert.*

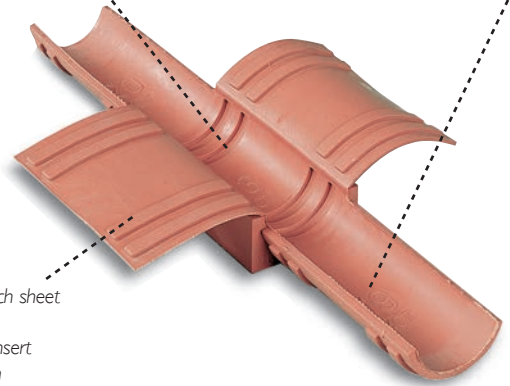

*On the bottom of each sheet you'll find four locking devices to keep the insert in place, making each AddBlock thoroughly secure.*

## Eleven blocks and 66 dimensions

AddBlocks are all the same length as standard Blocks, 60 mm (2.36"). The width of standard Blocks (A measurement, see table) are 20, 30, 40, 60 or 90 mm, (0.79"), (1.18"), (1.57"), (2.36") or (3.54")

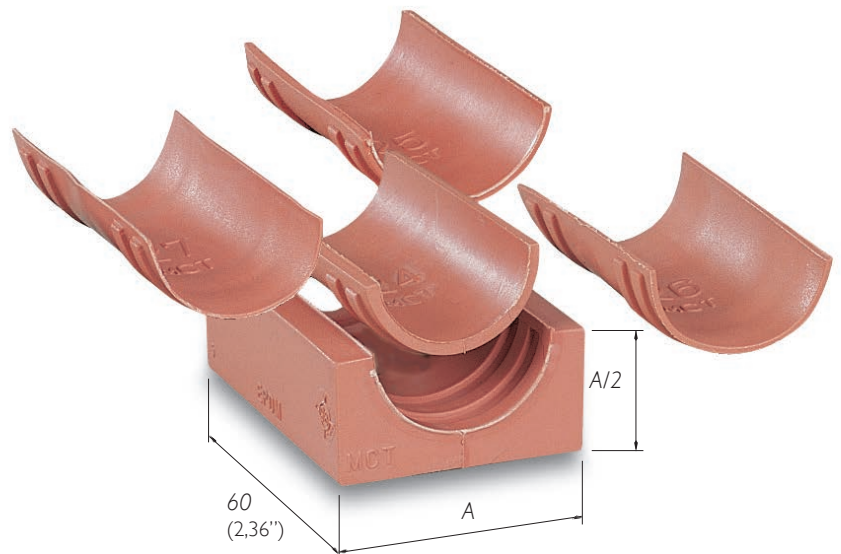




ADDBLOCK DIMENSION	CABLE OR PIPE DIMENSION (mm)	WEIGHT PER HALF (G)	CABLE OR PIPE DIMENSION( inches)	WEIGHT PER HALF (oz)
20/4 - 8	3,5 - 8,5	23	0.14 - 0.33	0.8
20/9 - 13	8,5 - 13,5	23	0.33 - 0.53	0.8
30/14 - 18	13,5 - 18,5	45	0.53 - 0.72	1.6
30/19 - 23	18,5 - 23,5	43	0.72 - 0.93	1.5
40/24 - 28	23,5 - 28,5	71	0.93 - 1.12	2.5
40/29 - 33	28,5 - 33,5	62	1.12 - 1.32	2.2
60/34 - 38	33,5 - 38,5	150	1.32 - 1.52	5.3
60/39 - 43	38,5 - 43,5	136	1.52 - 1.71	4.8
60/44 - 48	43,5 - 49,5	128	1.71 - 1.95	4.5
90/50 - 58	49,5 - 59,5	348	1.95 - 2.34	12.3
90/60 - 68	59,5 - 69,5	318	2.34 - 2.74	11.2

# Plugs and Wraps

The plug's main purpose is to prepare coming installations by creating a spare block together with an AddBlock. Once the cable penetration is to be done, the plug is removed and the AddBlock is reused.

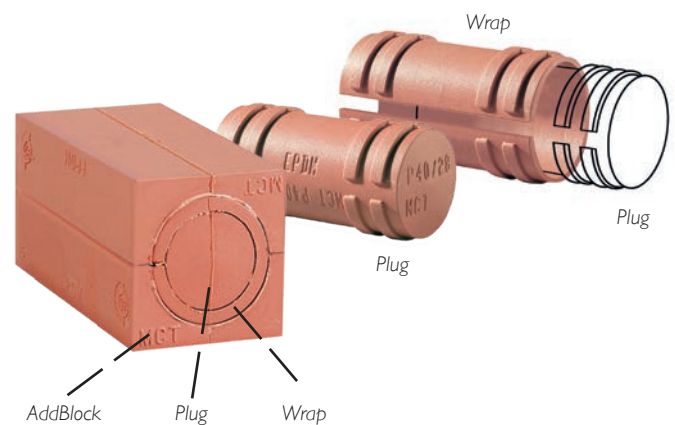

In the table you see which plug, or combination of plug and wrap-around casing, to use when turning an AddBlock into a spare block.

ADDBLOCK	PLUG	WRAP
20/4 - 8	P20/8	
20/9 - 13	P20/8 +	W20/8-13
30/14 - 18	P30/18	
30/19 - 23	P30/18 +	W30/18-23
40/24 - 28	P40-28	
40/29 - 33	P40-28 +	W40/28-33
60/34 - 38	P60/38	
60/39 - 43	P60/38 +	W60/38-43
60/44 - 48	P60/38 +	W60/38-43 and W60/43-48





# HandiBlock

The HandiBlock is designed to facilitate installation and minimize errors, allowing correction of errors and consequently minimization of wastage.

With HandiBlock the transit can always be pre-packed. If a cable or pipe is missing during assembly, the block is quickly rebuilt with a HandiPlug to a closed block and the transit can be completed at a later time.

HandiBlock is available in four sizes to fit cables and pipes from Ø 4 to 54 mm (Ø 1.58" to 2.13"). A HandiBlock consists of two compact MainBlocks with grooves on the inside and two inserts consisting of many compressed rings in different sizes. Each ring has clear markings for different cable sizes. It helps the technician to quickly and safely choose the right size of block, insert and ring. HandiBlock's design creates a seal as in compression do not deform the parts of the block. This means that all parts can be reused when repacking.

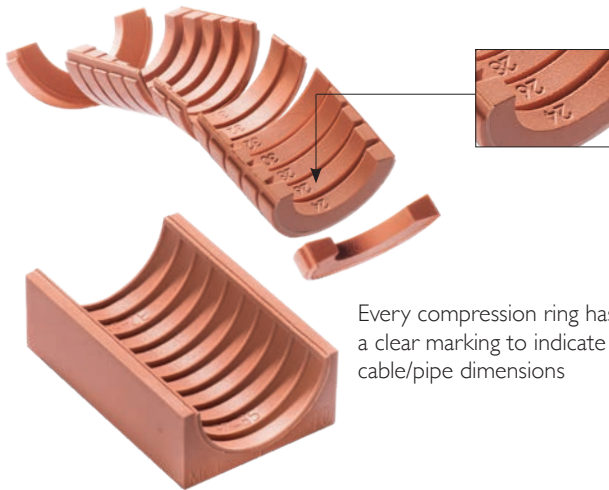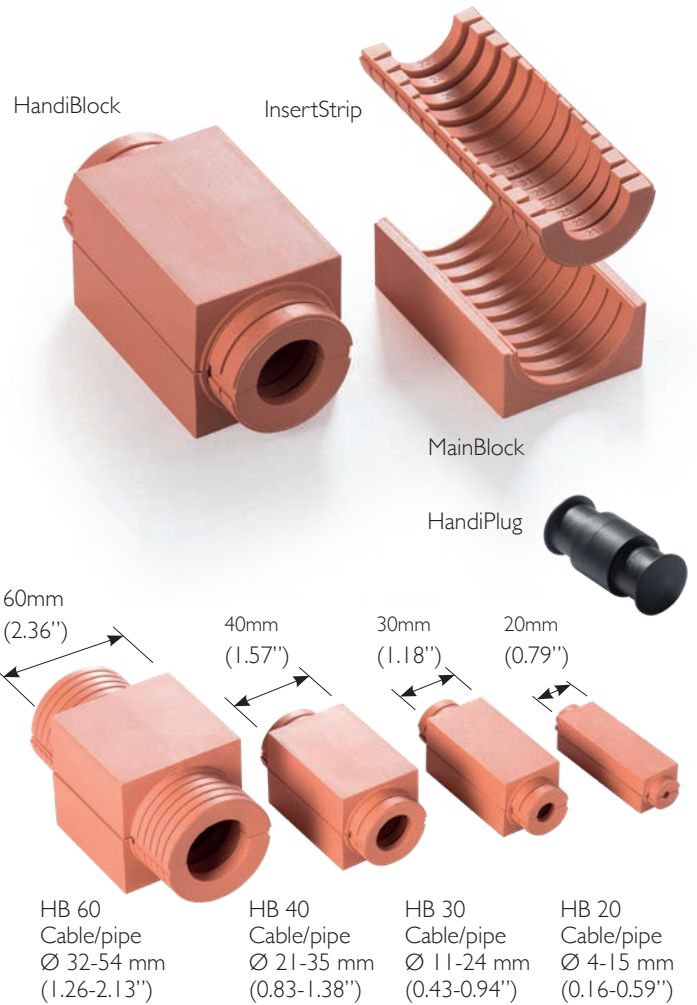

Every compression ring has a clear marking to indicate different cable/pipe dimensions

Extra fire protection! The part of the InsertStrip that protrudes from the MainBlock, acts as a small but effective heat shield.





Size		HandiBlock complete with Plug		HandiBlock without Plug		Plug		Mainblock		Insert Strip	
mm	(inches)	gram	(Oz)	gram	(Oz)	gram	(Oz)	gram	(Oz)	gram	(Oz)
20	0.79	37	1.31	32	1.13	5	0.18	22	0.78	10	0.35
30	1.18	90	3.17	73	2.57	17	0.60	46	1.62	27	0.95
40	1.57	150	5.29	117	4.13	33	1.16	72	2.54	44	1.55
60	2.36	382	13.58	300	10.58	85	3.00	155	5.47	144	5.08


# U-Blocks

The U-Block is used to convert the external dimensions of InsertBlocks, AddBlocks and HandiBlocks to the next modular size.

For example a 30/15 InsertBlock can be enlarged by placing it into a U40, giving the new size of 40/15.

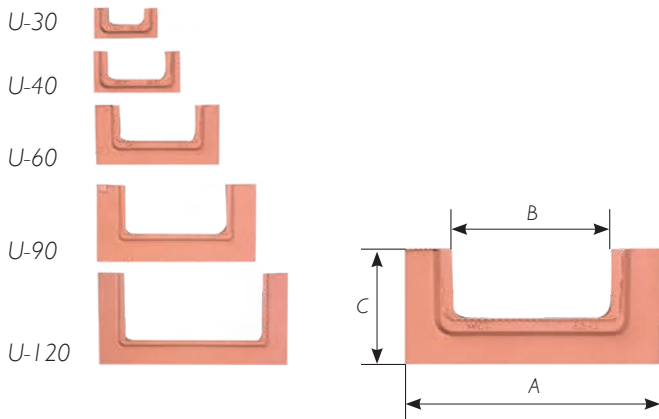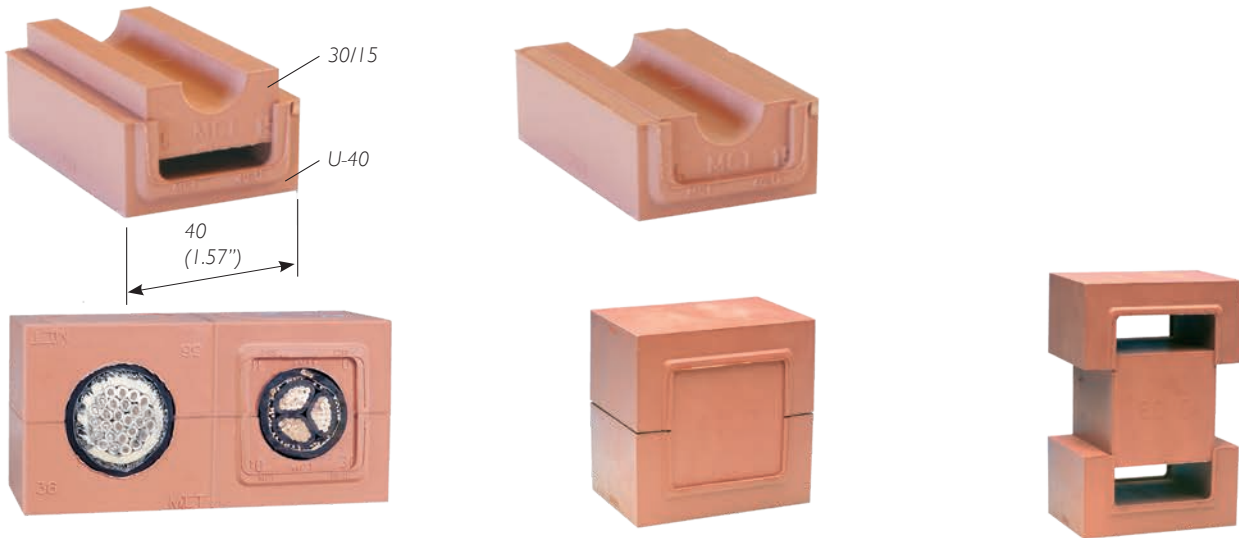


Dimensions U-BLOCK	A		B		C	
	mm	(inches)	mm	(inches)	mm	(inches)
U-30	30	1.18	20	0.79	15	0.59
U-40	40	1.57	30	1.18	20	0.79
U-60	60	2.36	40	1.57	30	1.18
U-90	90	3.54	60	2.36	45	1.77
U-120	120	4.72	90	3.54	45	1.77

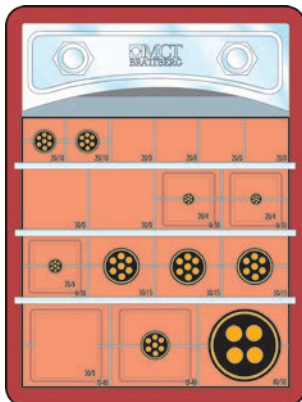

Regardless of cable diameter, you can retain the outer measurement of the block in any row.

With U-Blocks, you can easily center the cable or pipe in your RGP installation.

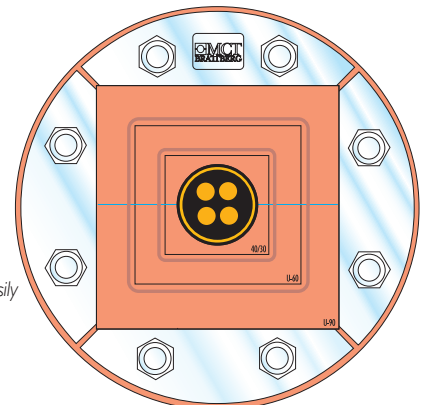

# MSR cable glands


The MSR glands are designed to seal up to 8 cables between 4 and 32 mm (0.16" and 1.26") diameter.

The seal is easy to install. Just remove the center core and minimize the number of rings to enable cables to pass through. When all cables are inserted into the gland simply tighten the four Hex Screws equally. Once complete the seal will provide an effective barrier against fire, water, dust, vermin etc. No welding is required

- A 60 Lloyds certified
- Pressure tested upto 5 bar
- MED Modular B approved for use in cruise liners & passenger vessels
- Each gland accommodates a range of cable diameters
- No additional parts or on site machining required
- Gland manufactured from stainless steel
- Housing/body manufactured in electroplated mild steel



Description	Hole size reqd diameter		Minimum cable diam.		Maximum cable		No of cables	Weight incl. sleeve	
	mm	inches	mm	inches	mm	inches		Kg	(Oz)
MSR 20 Type 1	21	0.83	4	0.16	12	0.47	1	0.29	10.23
MSR 40 Type 1	41	1.61	11	0.43	24	0.94	1	0.47	16.58
MSR 40 Type 2	41	1.61	6	0.24	15	0.59	2	0.49	17.28
MSR 40 Type 3	41	1.61	6	0.24	12	0.47	4	0.47	16.58
MSR 50 Type 1	51	2.01	5	0.20	10	0.39	5	0.79	27.87
MSR 50 Type 2	51	2.01	4	0.16	16	0.63	3	0.78	27.51
MSR 50 Type 3	51	2.01	20	0.79	32	1.26	1	0.75	26.46
MSR 63 Type 1	64	2.52	4	0.16	16	0.63	4	1.0	35.27
MSR 63 Type 2	64	2.52	5	0.20	10	0.39	8	1.0	35.27

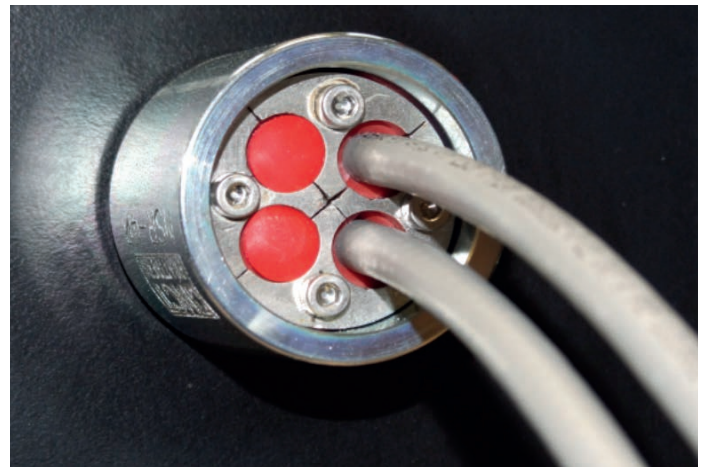

Dimensions in millimeter and inches. Weights in kilograms and Oz.  
Alternative cable configurations can be manufactured to suit specific customer requirements.



# SR cable and pipe seals

The SR glands are designed to seal cables or pipes between 4 and 100 mm (0.16 and 3.94") diameter.

The seal can be supplied cut to allow pre terminated cable to be installed. It is supplied with a center core providing a seal prior to cable installation. When the cable is inserted into the gland, simply tighten the compression bolts equally until cable is secure. Once complete the seal will provide an effective barrier against fire, water, dust, vermin, etc.

- Lloyds certified
- Pressure tested to 5 bar
- Gland is manufactured from stainless steel 316L and rubber
- Sleeves are supplied in electroplated mild steel



Ref	No of cables	Cable diameter min		Cable diameter max		Sleeve O/D		Weight incl. sleeve	
		mm	(inches)	mm	(inches)	mm	(inches)	Kg	(Oz)
SR 25	1	4	0.16	12	0.47	0.21	1.31	0.21	7.41
SR 38-1	1	11	0.43	24	0.94	0.33	1.90	0.33	11.64
SR 38-2	2	6	0.24	15	0.59	0.35	1.90	0.35	12.35
SR 38-3	4	6	0.24	12	0.47	0.33	1.90	0.33	11.64
SR 49	1	20	0.79	32	1.26	0.56	2.37	0.56	19.75
SR 62	1	30	1.18	42	1.65	0.88	2.87	0.88	31.04
SR 77	1	42	1.65	52	2.05	1.30	3.50	1.30	45.86
SR 102	1	52	2.05	70	2.76	2.30	4.50	2.30	81.13
SR 125	1	70	2.76	85	3.47	3.41	5.51	3.41	120.28
SR 150	1	85	3.35	100	3.94	4.11	6.63	4.11	144.98

Dimensions in millimeter and inches. Weights in kilograms and Oz.

Alternative cable configurations can be manufactured to suit specific customer requirements

# Deck and bulkhead penetration glands


A flexible penetration for single cables. No additional parts or on site machining required.

Glands supplied in electro plated mild steel with brass nuts.

Ability to fix to Metric threaded Conduit. Available with EMC/EMI protection.

This penetrations were in the beginning specifically developed for the British Royal Navy, but are now sold worldwide to various maritime applications, ships, oil platforms, gas carriers, cruise liners and more.

- Lloyds certified Pressure tested to 5 bar
- Certified to DEF STAN 02-510
- NATO stock coded
- Lloyds certified to A 60 Approval (metal housing)

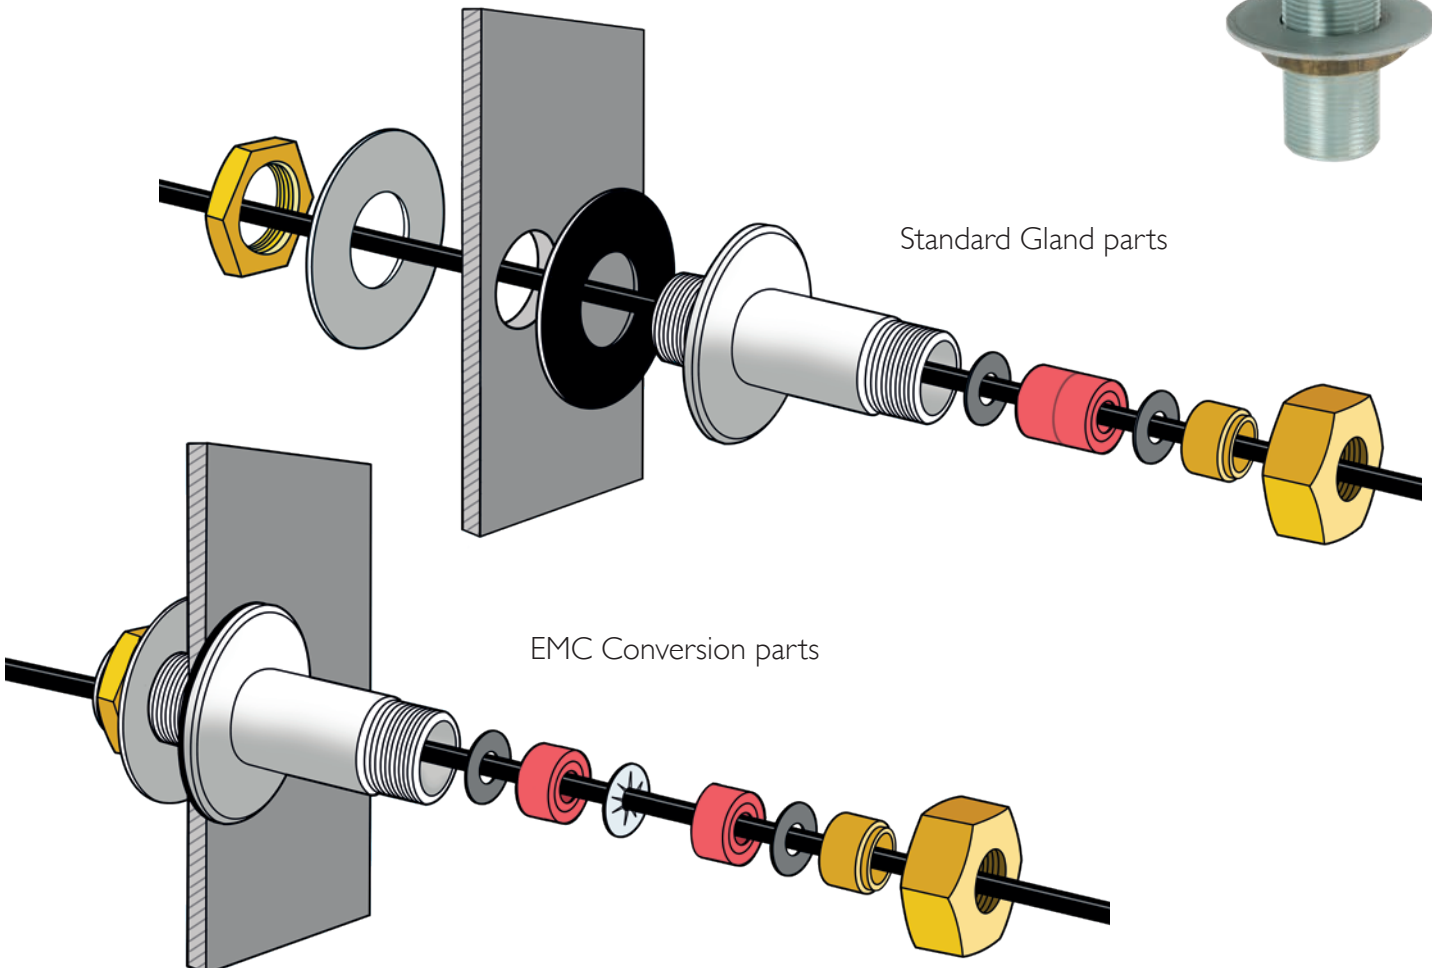

Ref	Cable range max		Cable range max		Metric thread	Flange diameter		Nut A/F		Weight	
	mm	in	mm	in		mm	in	mm	in	kg	lb
<b>150 mm (5.90") gland assembly with 30 mm ( 1.18") long thread</b>											
D&B 16-150-30	4	0.16	16	0.63	M33x2	70	2.76	46	1.81	1.45	3.20
D&B 25-150-30	13	0.51	25	0.98	M50x2	80	3.25	65	2.56	2.62	5.77
D&B 35-150-30	23	0.91	35	1.31	M60x2	100	3.94	80	3.15	3.51	7.74
D&B 50-150-30	32	1.26	50	1.97	M75x2	120	4.72	100	3.94	5.05	11.13
D&B 60-150-30	48	1.89	60	2.36	M90x2	150	5.98	120	4.72	7.42	16.36
<b>150 mm (5.90") gland assembly with 70 mm ( 2.76") long thread</b>											
D&B 16-150-70	4	0.16	16	0.63	M33x2	70	2.76	46	1.81	1.63	3.59
D&B 25-150-70	13	0.51	25	0.98	M50x2	80	3.25	65	2.56	3.03	6.68
D&B 35-150-70	23	0.91	35	1.31	M60x2	100	3.94	80	3.15	4.14	9.13
D&B 50-150-70	32	1.26	50	1.97	M75x2	120	4.72	100	3.94	5.71	12.59
D&B 60-150-70	48	1.89	60	2.36	M90x2	150	5.98	120	4.72	8.08	17.81
<b>75 mm (2.95") gland assembly with 30 mm ( 1.18") long thread</b>											
D&B 16-75-30	4	0.16	16	0.63	M33x2	70	2.76	46	1.81	1.02	2.25
D&B 25-75-30	13	0.51	25	0.98	M50x2	80	3.25	65	2.56	1.81	3.99
D&B 35-75-30	23	0.91	35	1.31	M60x2	100	3.94	80	3.15	2.48	5.47
D&B 50-75-30	32	1.26	50	1.97	M75x2	120	4.72	100	3.94	3.55	7.83
D&B 60-75-30	48	1.89	60	2.36	M90x2	150	5.98	120	4.72	6.20	13.67
<b>75 mm (2.95") gland assembly with 70 mm ( 1.18") long thread</b>											
D&B 16-75-70	4	0.16	16	0.63	M33x2	70	2.76	46	1.81	1.19	2.62
D&B 25-75-70	13	0.51	25	0.98	M50x2	80	3.25	65	2.56	2.11	4.65
D&B 35-75-70	23	0.91	35	1.31	M60x2	100	3.94	80	3.15	2.94	6.48
D&B 50-75-70	32	1.26	50	1.97	M75x2	120	4.72	100	3.94	4.20	9.26
D&B 60-75-70	48	1.89	60	2.36	M90x2	150	5.98	120	4.72	6.95	15.32



# Welding instructions

Welding sequence of a two-pass fillet shall be performed in the following steps with minimize heat input.


1 – Fix with tack weld points, maximum 150 mm (5.90") between.

2 – Root weld 1.1 and 2.1



3 – Fillet weld 1.2 and 2.2

4 – Seal weld 3 and 4

Weld pass 4 is not to be started until weld 2 and 3 are completed!

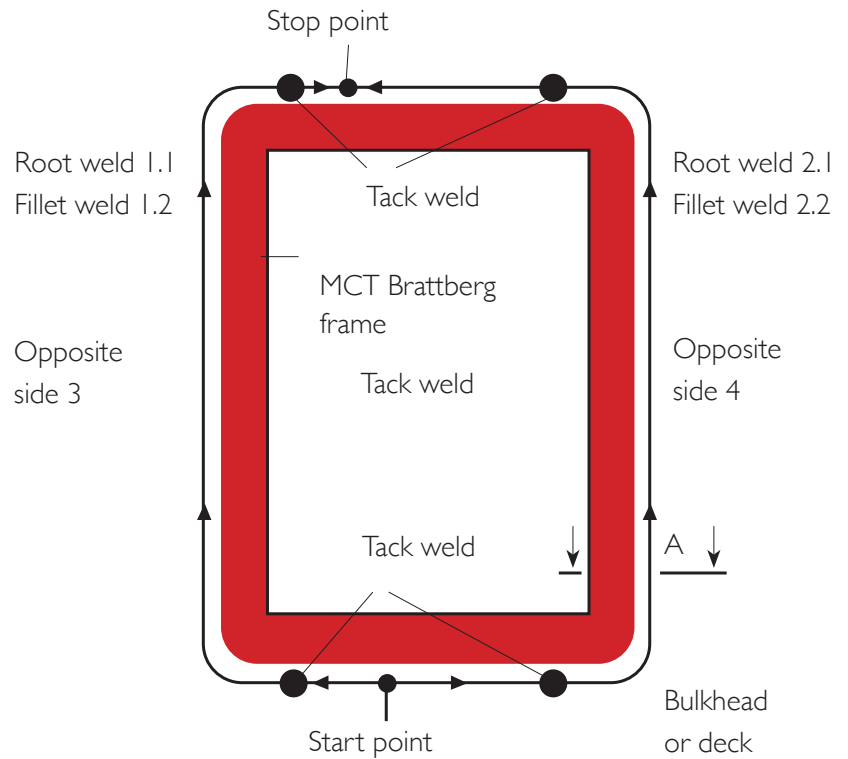

Three different welding sequences

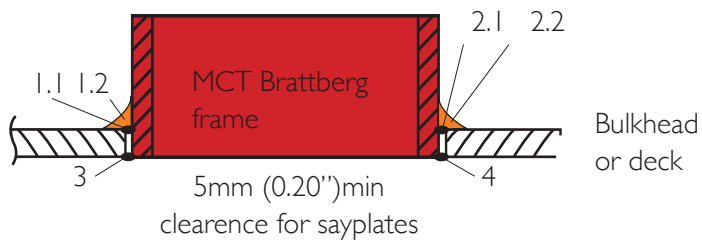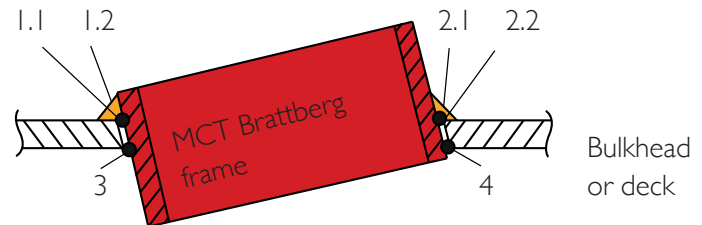


1.1 Root weld	1.2 Fillet weld	3 Seal weld
2.1 Root weld	2.2 Fillet weld	4 Seal weld

Fillet weld size for a centre-placed frame

Fillet weld size (throat thickness) is to be  $0.5 \times$  plate thickness of the bulkhead or deck plate (THD). However fillet weld size is not to be greater than  $0.7 \times$  frame plate thickness (THF).

$a$  = Fillet size (throat thickness) Note!  
 THD = Thickness deck plate  
 THF = Thickness frame plate  
 Multi-pass welding is required if  $a \geq 5 \text{ mm (0.20")}$

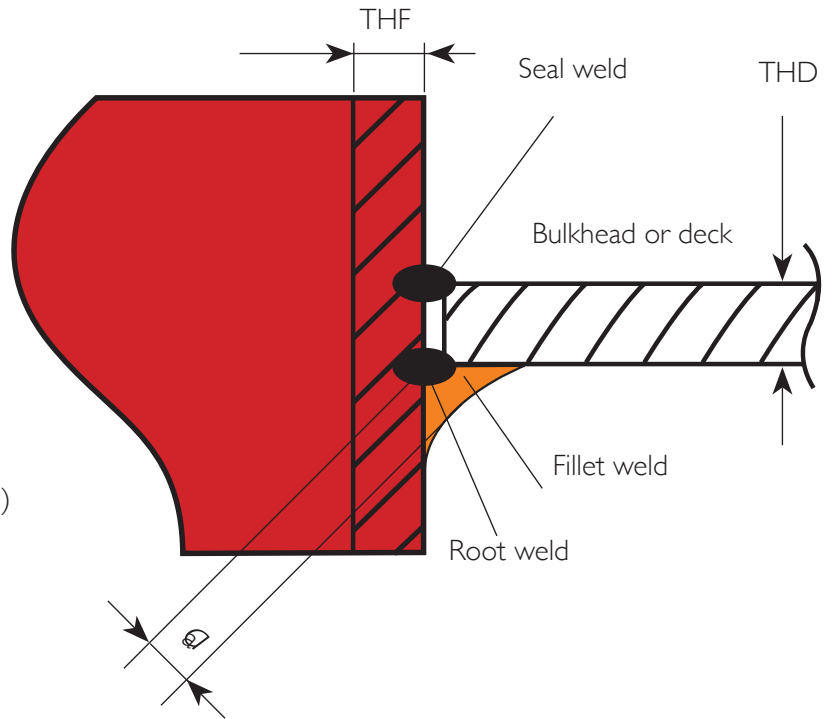

Maximum allowable root gap for fillet joint

If root gap is too wide the deck plate or bulkhead may be built up with weld to achieve a proper gap (see Figure 2).

Figure 1





Build-up of fillet joint


Figure 2




Note! Weld build up on the frame is not recommended as it may cause deformation of the frame.

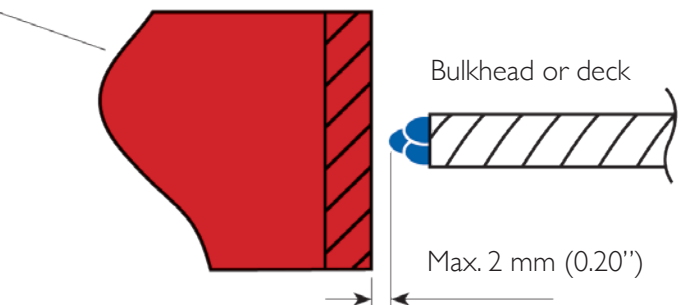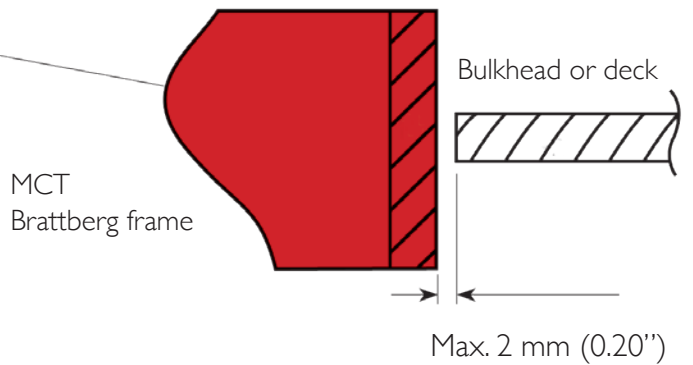

# Installation Guide



**1** Measure the opening and check that the measurement is within the tolerance range  $120.5 \text{ mm} \pm 0.5 \text{ mm}$  ( $4.74'' \pm 0.02''$ ). Check that the frame is clean and pull through the cables. Measure the diameter of the cables and choose suitable blocks. Lubricate the inner faces of the frame.



**2** Insert Block. The blocks are identified by their width (A) and hole diameter (B). A block that is  $30 \text{ mm}$  ( $1.18''$ ) wide and has a hole diameter of  $18 \text{ mm}$  ( $0.71''$ ) is marked 30/18. This marking is cast into the block.




**3** Pack the frame. Place stayplates between each row of blocks

## STG ENDPACKING




**4** Pack the frame. Place stayplates between each row of blocks.



**5** Insert the top row of blocks.




**6** Tighten the bolt in the compression plate anticlockwise until there is a gap of  $32\text{-}33 \text{ mm}$  ( $1.26\text{-}1.30''$ ) between the top of the plate and the inside of the frame.




**7** Insert the STG endpacking with the tongue around the compression bolt. Tighten the nuts in the endpacking until  $12\text{-}15 \text{ mm}$  ( $0.47\text{-}0.59''$ ) of thread is visible.


## PTG PRESSWEDGE, ALLEN AND HEX




**4** Place the last two stayplates in the frame before the last row of blocks. Then fit the PTG presswedge over the stayplates.



**5** Insert the final row of blocks. Tighten the nuts in the PTG to the end or  $20 \text{ Nm}$ .



**6** Insert the final row of blocks. Tighten the nuts in the PTG to the end or  $20 \text{ Nm}$ .




**7** The PTG presswedge may be placed anywhere in the frame.

## Pressure-tight installation


Check that the frame is clean and that the inside is well lubricated. All Lycron parts must be lubricated carefully with MCT Brattberg lubricant. Place the compression plate in the centre so that the Lycron rubber is pushed upwards between the compression plate and the frame. The seal must not be subjected to pressure for at least 48 hours after installation. This is to allow the pressure to equalise throughout the penetration. It will take more time for the pressure to equalise at temperatures below  $20^\circ\text{C}$ .

## RGSC WITH STG ENDPACKING

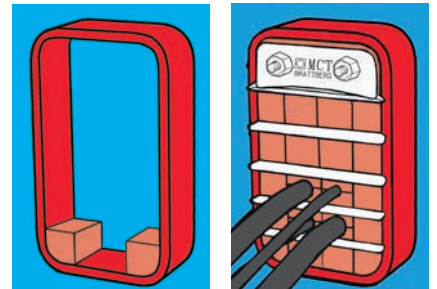

Begin packing with the special corner blocks. Proceed as shown in image 3 and then see STG Endpacking image 4-6. Insert endpacking C-STG (with special corner blocks). Tighten the nuts on the endpacking to compress and complete the seal. About  $12 \text{ mm}$  ( $0.47''$ ) of the thread should protrude on each bolt.


## RGSC WITH PRESSWEDGE

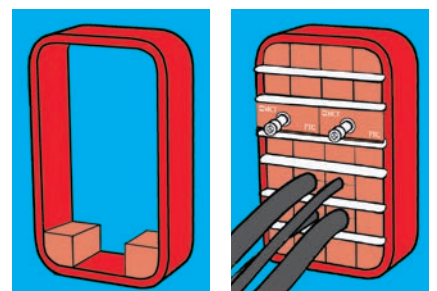

Begin packing with the special corner blocks. Proceed as shown in image 3 and then see PTG Presswedge. The PTG presswedge can be placed anywhere except at the top or bottom. At the top row insert the special corner blocks and then the last row of blocks. Tighten the nuts in the PTG to the end or  $20 \text{ Nm}$ .




## AddBlock




Measure the opening and check that the measurement is within the tolerance range 120.5 mm +/- 0.5 mm (4.74" +/- 0.02"). Check that the frame is clean and pull through the cables. Measure the diameter of the cables and choose suitable blocks. Lubricate the inner faces of the frame.




Tear off attached sheet to fit the dimension selected.




Place sheet into centre slot and affix it with the unique locking device.



Tear off superfluous sheets.




Pack the frame. Place stayplates between each row of blocks.




Plugs for AddBlock and HandiBlock see page 29 and 30.


## HANDBLOCK



Measure the opening and check that the measurement is within the tolerance range 120.5 mm +/- 0.5 mm (4.74" +/- 0.02"). Check that the frame is clean and pull through the cables. Measure the diameter of the cables and choose suitable blocks. Lubricate the inner faces.




Select the HandiBlock that fits the cable / tube.




Select the two compression rings closest to the cable diameter. Remove all compression rings smaller than the selected.



If the insert gets longer than the block, remove the current rings in the middle.




Place the two inserts in the main block so that the outermost rings are at the outer edge of the main block.




Build the second block half the same way. Insert the cable / tube and lay over the block half. Continue packing as shown in figure 4 on the left side.


## U-Block




Measure the opening and check that the measurement is within the tolerance range 120.5 mm +/- 0.5 mm (4.74" +/- 0.02"). Check that the frame is clean and pull through the cables. Measure the diameter of the cables and choose suitable blocks. Lubricate the inner faces of the frame.



Select a suitable block for the largest cable in the row.



Select a suitable InsertBlock or AddBlock for the small cable. Then create a base using U-Blocks. The external measurements should be the same as the previous block.




Start packing the frame.




Insert stayplates between each row of insert blocks.

# Horizontal Installation Guide



**1** Measure the opening and check that the measurement is within the tolerance range 120.5 mm +/- 0.5 mm (4.74" +/- 0.02"). Check that the frame is clean and pull through the cables. Measure the diameter of the cables and choose suitable blocks. Lubricate the inner faces of the frame.




**2** The blocks are identified by their width (A) and hole diameter (B). A block that is 30 mm (1.18") wide and has a hole diameter of 18 mm (0.71") is marked 30/18. This marking is cast into the block.




**3** To prevent the blocks from falling through during horizontal installation, fit all the stayplates and the compression plate first. Check the RG plan to make sure the cables are positioned correctly.



**4** Insert the outer blocks first (A, B, C, etc). Then insert the rest of the blocks. Note: block A must be rotated 90°, see diagram.



**5** Pack the frame. Tighten the bolt in the compression plate anticlockwise until there is a gap of 32-33 mm (1.26"-1.30") between the top of the plate and the inside of the frame.




**6** Insert the STG endpacking with the tongue around the compression bolt. Tighten the nuts in the endpacking until 12-15 mm (0.47"-0.54") of thread is visible.

# Disassembly Guide

## STG


**1**

Remove the nuts and the hardware from the face of the endpacking.

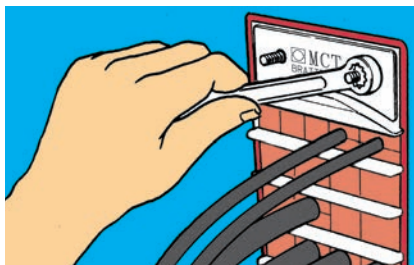


**2**

Attach the endpacking puller to the bolts with the nuts from the endpacking.

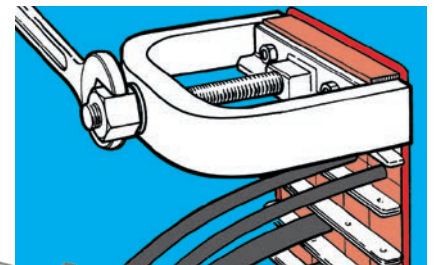


**3**

Tighten the bolt on the puller and the endpacking slides out.

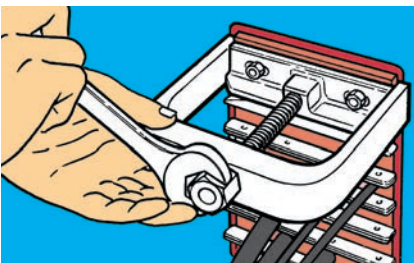


**4**

Remove the endpacking.

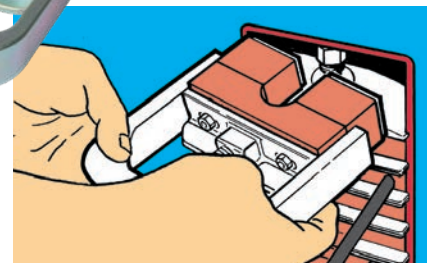


# RGP Installation




**1**

Measure the pipe/drilled hole to ensure that the size conforms to tolerance standards.




**2**

Insert the RGP frame in the opening. No lubricant should be applied to the hole or to the outside of the frame.




**3**

Place the frame in correct position in the hole. Check that the frame is clean and pull through the cables. Place the largest cables at the bottom of the frame. Measure the diameter of the cables and choose suitable blocks.




**4**

InsertBlock. The blocks are identified by their width (A) and hole diameter (B). A block that is 30 mm (1.18") wide and has a hole diameter of 18 mm (0.71") is marked 30/18. This marking is cast into the block.



**5**

Begin packing.



**6**

Tighten the nuts in diagonal order until 10-12 mm (0.39"-0.47") of thread is visible.


Dimensions for pipes and drilled holes			
RGP type	RGP ID mm	RGP type	RGP ID Inches
RGP 50	50-51	RGP 2"	1.97-2.01"
RGP 70	70-71	RGP 3"	3-3.04"
RGP 100	100-102	RGP 4"	4-4.08"
RGP 125	125-127	RGP 5"	5-5.08"
RGP 150	150-152	RGP 6"	6-6.08"
RGP 200	200-202	RGP 8"	8-8.08"
RGP 300	300-302	RGP 11.8"	11.8"-11.9"

## PRESSURE-TIGHT INSTALLATION RGP


All contact surfaces between the pipe and the RGP plug must be cleaned carefully prior to installation. Do not use any lubricant on these surfaces. All blocks must be lubricated carefully with MCT Brattberg lubricant. The penetration must not be subjected to pressure for at least 48 hours after installation. This is to allow the pressure to equalise throughout the penetration.

It will take more time for the pressure to equalise at temperatures below 20°C.


# Deck and bulkhead Installation Guide

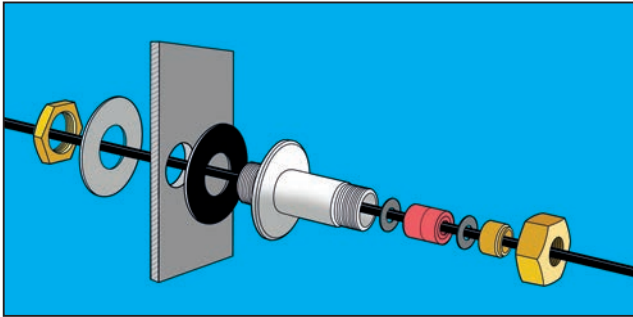


Standard Gland parts.




1 Clearance hole  
= Thread diameter  
+ 2 mm max.

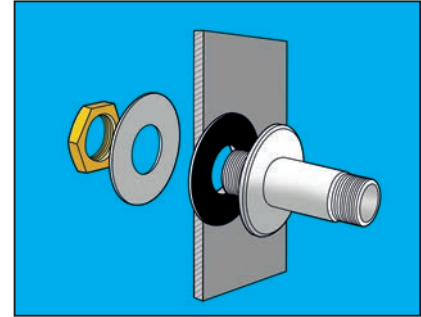


2 Fit the gasket and washer.

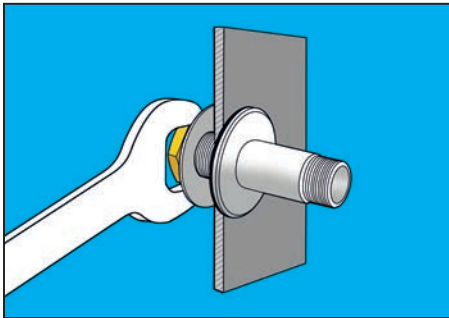


3 Tighten the lock nut.

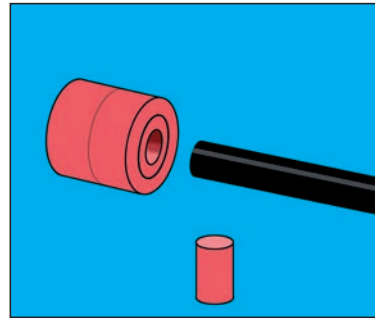


4 Remove the minimum number of rings to allow cable to pass through the seal.

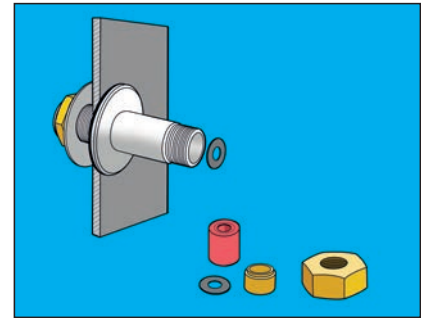


5 Size the first washers to cable and insert it if required.

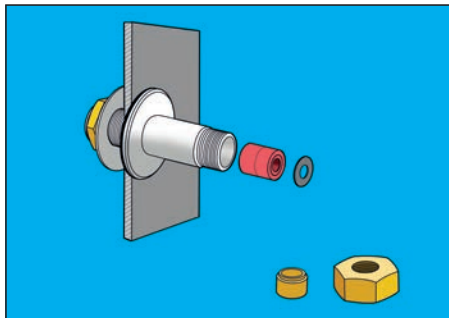

6 Push seal into place.

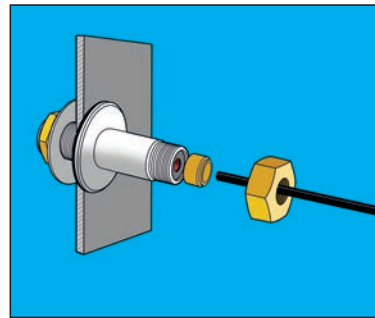


7 Size the second washer to the cable and insert it to the cable if required

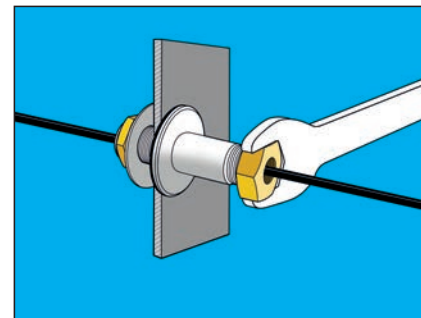


8 Push cable through assembled gland and tighten nut.



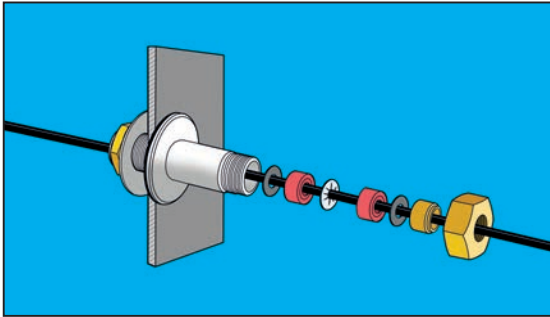


**EMC Conversion parts.**


See figure 1-3 on the left page and then continue on this page, figure 2-11.

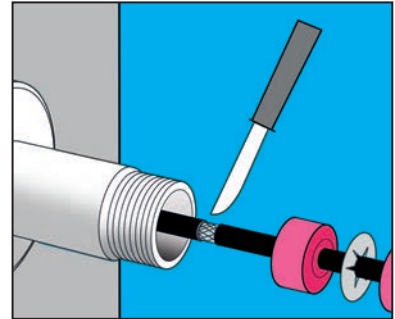


**4** Pull cable through gland and carefully trim 5 mm of outer sheath.

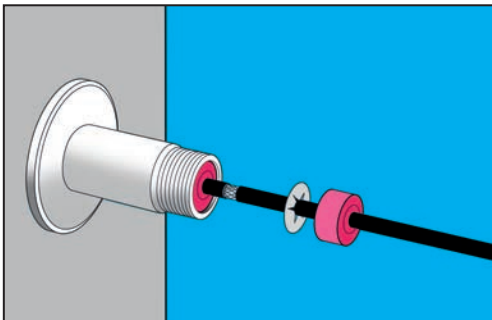


**5** Push first piece of seal into place.

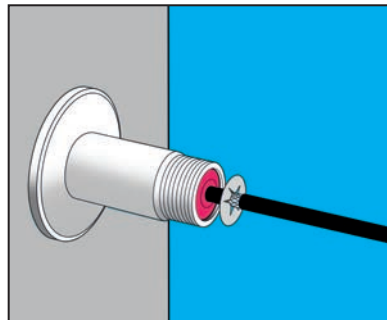


**6** Slide EMC piece over cable until contacts with cable braid.

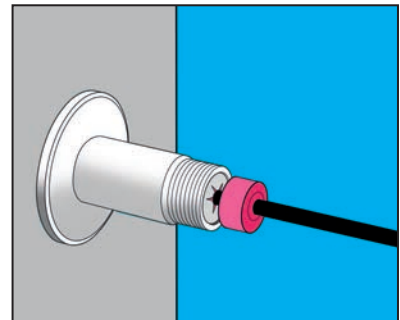


**7** Slice 2nd piece of seal over cable.




**8** Carefully push complete seal and cable back into gland maintaining EMC contact.

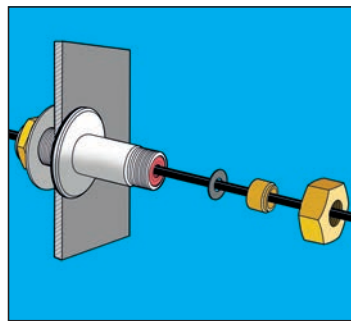

**9** Carefully push complete seal and cable back into gland maintaining EMC contact.



**10** Size the second washer to the cable and insert it to the cable if required



**11** Push cable trough assembled gland and tighten nut.



[www.mctbrattberg.com](http://www.mctbrattberg.com)

MCT Brattberg AB  
SE-371 92 Karlskrona  
Sweden  
Phone: +46-455 37 52 00  
Fax: +46-455 37 52 90  
E-mail: [info@mctbrattberg.se](mailto:info@mctbrattberg.se)  
Website: [www.mctbrattberg.se](http://www.mctbrattberg.se)

MCT Brattberg Ltd  
Commerce Street  
Carrs Industrial Estate Haslingden  
Lancashire BB4 5JT  
England  
Tel: +44 - 170 624 4890  
Fax: +44 - 170 624 4891  
E-mail: [info@mctbrattberg.co.uk](mailto:info@mctbrattberg.co.uk)

MCT BRATTBERG/CMUS  
Houston  
3332 Spring Stuebner Rd.  
Suite G, Spring, TX 77379  
USA  
Phone +1-281 355 8191  
E-mail: [cclarke@brattberginc.com](mailto:cclarke@brattberginc.com)

MCT/CMUS Florida  
Consilium Marine US Inc  
4370 Oakes Road 721  
Fort Lauderdale  
FL 33314  
USA  
Phone +1 954 453 1286  
E-mail: [info@consiliummarineus.com](mailto:info@consiliummarineus.com)

**We have representatives in:**

*Austria - Australia - Bulgaria - Brazil - Canada - China - Croatia - Denmark - Egypt - Finland - France - Germany - Greece - Hong Kong - Hungary - Iceland - India  
Indonesia - Ireland - Israel - Italy - Japan - Korea - Malaysia - Netherlands - New Zealand - Norway - Oman - Philippine Islands - Poland - Portugal - Qatar  
Romania - Russia - Saudi Arabia - Singapore - Spain - South Africa - Switzerland - Taiwan - Turkey - Thailand - UAE - Ukraine - United Kingdom - USA*

Visit our website or contact MCT Brattberg for details of your nearest distributor.