



## Data Sheet 1530661

**Product:** Stikk. m/j dob.m/barnev vt påv  
**El-number:** 1530661  
**Mat.no:** EKO04322  
**EAN:** 7020160432216  
**Packing:** 5  
**Color:** Polarwhite




**Product description:** Splashproof double socket outlet surface mounted. Delivered with lid and shutters. The socket outlet must be installed with the hinges in the top. Membranes must be punctured with cable, to maintain IP44. Classification: IP44 (The lowest IP degree must be considered when combinations of plug and socket outlets are in use)

---


**Technical specifications:** IP44 Double socket outlet surface mounted.  
With earth  
Voltage: 16A / 250VAC.  
Delivered with shutters  
Mounting: Surface mounting  
Color: Polarwhite.  
Halogenfree.  
Degree of protection: IP44 (The lowest IP degree must be considered when combinations of plug and socket outlets are in use)  
Screw terminals  
Maximum torque: 1,2Nm (According to IEC 62196-1)  
Maximum cross section: 4mm<sup>2</sup>  
Corrosion protected

---

### Size



### Wiring diagram

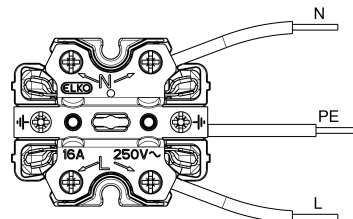

### ELKO AS

E-mail: [elko@elko.no](mailto:elko@elko.no)  
Internet: [www.elko.no](http://www.elko.no)  
Bank: 6219.05.15880  
Org.no.: NO 911 382 563 MVA

ELKO Front office  
Sandstuveien 68, NO-0680 Oslo  
P.O.Box 6598 Etterstad, NO-0607 Oslo  
Tel.: +47 67 80 73 00  
Fax: +47 67 80 73 01

ELKO Plant  
Sporpind Industrieråde, NO-3340 Åmot  
Tel.: +47 32 78 91 00  
Fax: +47 32 78 91 01